


TERMINAL BLOKS™
Insulated Terminal Block
ITB SERIES

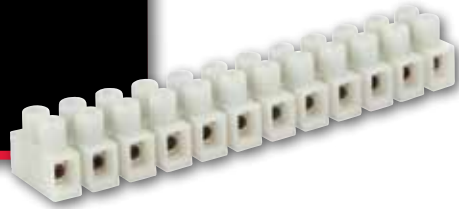

FEATURES

- Nylon 66 housing ensures 'touchproof' safety.
- Recessed screws and tubular contacts provide additional safety and help prevent short circuits.
- Integrated stainless steel spring wire protectors prevent twisting and breaking of stranded wires during installation.
- Tubular contacts connect stripped solid or stranded un-terminated wire directly to each contact.
- Modular design allows for connector to be cut into smaller sections or stacked end-to-end.
- Brass metal alloy, nickel plated terminal insert.
- Zinc plated, yellow chromed screws.

RATINGS



Rated UL 94V-2.

TEMPERATURE RATING:

110 °C.

VOLTAGE:

300V.

CAT. NO.	NO. OF CIRCUITS	RATINGS
ITB20-12	12	RU
		CSA
ITB30-12	12	RU
		CSA
ITB35-12	12	CRU
ITB50-12	12	CRU



AMPS	WIRE RANGE	DIMENSIONS						STD. CTN. QTY.
		A	B	C	D	E	F	
20	22-12	3.787	0.669	0.570	0.315	0.114	0.110	50
10	20-18							
30	22-10	4.626	0.795	0.670	0.394	0.142	0.134	50
20	18-14							
35	22-10	5.540	0.937	0.748	0.472	0.154	0.154	40
50	20-8	6.220	1.008	0.992	0.531	0.173	0.189	25

DIMENSIONS

