

# Technical Information Bulletin

## LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION


Order code: 67950  
 Description: LED/A19/S5/6W/40K/STD  
 UPC: 069549679504  
 Case quantity: 1 / 100

### PERFORMANCE DATA

Shape: A19  
 Wattage (W): 6  
 Base: E26  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 4 000  
 Life L70 (hrs): 25 000  
 Initial lumens (lm)\*: 480  
 Initial lumens per watt (lm/W): 80  
 CRI: 80  
 Beam angle (°): 220  
 Power factor: 0.70  
 Operating temperature range: - 30 °C / - 22 °F to 40 °C / 104 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %

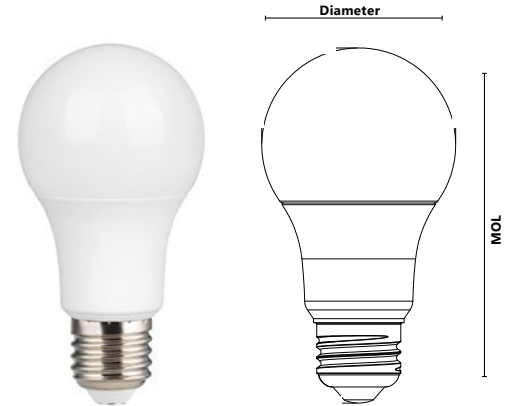

MOL : 4 1/4 in. (108 mm)

Dia. : 2 3/8 in. (60 mm)

### COMPATIBLE DIMMERS

| Brand   | Model  |
|---------|--|
| Lutron  | PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P |
| Cooper  | RRD-6NA, AAL06   |
| Leviton | IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1  |
| Legrand | RH703PTUTC   |

Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved with at two or more lamps.

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.