

GV2LE04

TeSys GV2 Manual Starter and Protector, magnetic circuit protector, toggle switch, 0.63 A, screw clamp terminals



Main

| | |
|---------------------------|-----------------------|
| Range | TeSys Deca |
| Product name | TeSys GV2 |
| Product or Component Type | Motor circuit breaker |
| Device short name | GV2LE |
| Device Application | Motor protection |
| Trip unit technology | Magnetic |

Complementary

| | |
|---|--|
| Poles description | 3P |
| Network type | AC |
| Utilisation category | Category A IEC 60947-2 AC-3 IEC 60947-4-1 AC-3e IEC 60947-4-1 |
| Network frequency | 50/60 Hz IEC 60947-2 |
| Fixing mode | 35 mm symmetrical DIN rail clipped Panel screwed with adaptor plate) |
| Motor power kW | 0.12 kW 400/415 V AC 50/60 Hz 0.18 kW 400/415 V AC 50/60 Hz 0.37 kW 690 V AC 50/60 Hz |
| Breaking capacity | 100 KA Icu 230/240 V AC 50/60 Hz IEC 60947-2 100 KA Icu 400/415 V AC 50/60 Hz IEC 60947-2 100 KA Icu 440 V AC 50/60 Hz IEC 60947-2 100 KA Icu 500 V AC 50/60 Hz IEC 60947-2 100 kA Icu 690 V AC 50/60 Hz IEC 60947-2 |
| [Ics] rated service short-circuit breaking capacity | 100 % 230/240 V AC 50/60 Hz IEC 60947-2 100 % 400/415 V AC 50/60 Hz IEC 60947-2 100 % 440 V AC 50/60 Hz IEC 60947-2 100 % 500 V AC 50/60 Hz IEC 60947-2 100 % 690 V AC 50/60 Hz IEC 60947-2 |
| Control type | Toggle |
| Line Rated Current | 0.63 A |
| Magnetic tripping current | 8 A |
| [Ith] conventional free air thermal current | 0.63 A IEC 60947-4-1 |
| [Ue] rated operational voltage | 690 V AC 50/60 Hz IEC 60947-2 |
| [Ui] rated insulation voltage | 690 V AC 50/60 Hz IEC 60947-2 |
| [Uimp] rated impulse withstand voltage | 6 kV IEC 60947-2 |
| Suitability for isolation | Yes IEC 60947-1 § 7-1-6 |
| Power dissipation per pole | 1.8 W |
| Mechanical durability | 100000 cycles |
| Electrical durability | 100000 Cycles AC-3 415 V In 100000 cycles AC-3e 415 V In |
| Rated duty | Continuous IEC 60947-4-1 |
| Tightening torque | 15.05 lbf.in (1.7 N.m) screw clamp terminal |
| Width | 1.77 in (45 mm) |
| Height | 3.50 in (89 mm) |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|------------|-----------------------|
| Depth | 3.09 in (78.5 mm) |
| Net Weight | 0.73 lb(US) (0.33 kg) |
| Color | Dark grey |

Environment

| | |
|---------------------------------------|---|
| Standards | EN/IEC 60947-2 EN/IEC 60947-4-1 UL 60947-4-1 CSA C22.2 No 60947-4-1 |
| Product Certifications | CCC[RETURN]UL[RETURN]CSA[RETURN]EAC[RETURN]LROS (Lloyds register of shipping)[RETURN]BV[RETURN]RINA[RETURN]DNV- GL[RETURN]UKCA[RETURN]IECEE CB Scheme |
| IK degree of protection | IK04 |
| IP degree of protection | IP20 IEC 60529 |
| Climatic withstand | IACS E10 |
| Ambient Air Temperature for Storage | -40...176 °F (-40...80 °C) |
| Fire resistance | 1760 °F (960 °C) IEC 60695-2-11 |
| Ambient air temperature for operation | -4...140 °F (-20...60 °C) |
| Mechanical robustness | Shocks 30 Gn for 11 ms Vibrations 5 Gn, 5...150 Hz |
| Operating altitude | 6561.68 ft (2000 m) |

Ordering and shipping details

| | |
|-------------------|---|
| Category | 18402-WORLD SERVICE PARTS(CONTROL ACCESS) |
| Discount Schedule | CP10 |
| GTIN | 3389110516883 |
| Returnability | No |
| Country of origin | FR |

Packing Units

| | |
|------------------------------|-------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.35 in (8.5 cm) |
| Package 1 Width | 3.66 in (9.3 cm) |
| Package 1 Length | 1.89 in (4.8 cm) |
| Package 1 Weight | 7.90 oz (224.0 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 24 |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 12.51 lb(US) (5.676 kg) |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant with Exemptions |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |

Circularity Profile

 [End Of Life Information](#)

WEEE

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Contractual warranty

Warranty

18 months

Tripping Curves for GV2L or LE Combined with Thermal Overload Relay LRD or LR2K

Average Operating Times at 20 °C Related to Multiples of the Setting Current

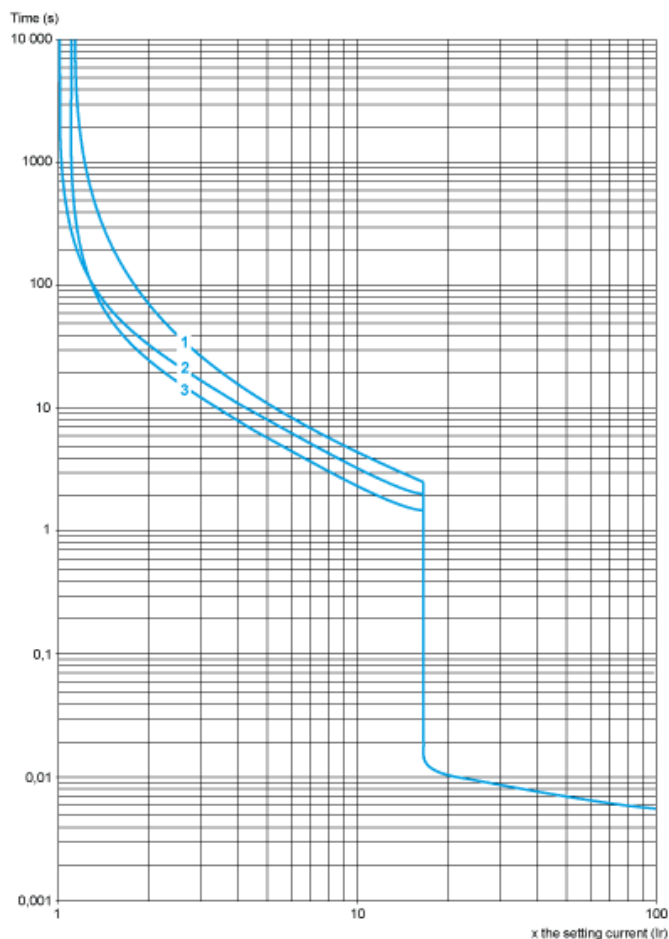


- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current Limitation on Short-Circuit for GV2L and GV2LE Only (3-Phase 400/415 V)

Dynamic Stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

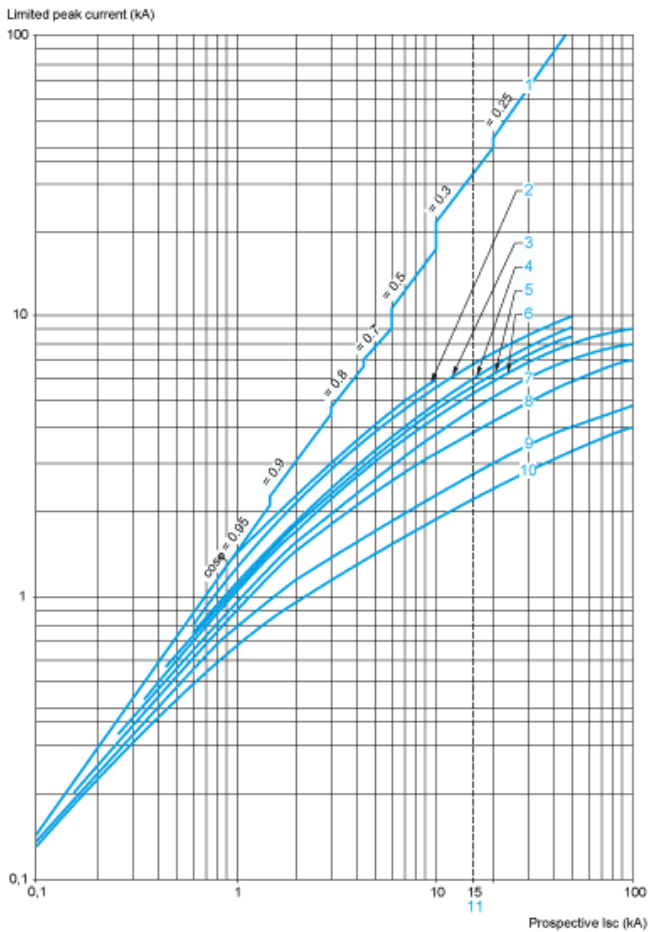

- 1 Maximum peak current
- 2 32 A
- 3 25 A
- 4 18 A
- 5 14 A
- 6 10 A
- 7 6.3 A
- 8 4 A
- 9 2.5 A
- 10 1.6 A
- 11 Limit of rated ultimate breaking capacity on short-circuit of GV2LE (14, 18, 23, and 25 A ratings).

Current Limitation on Short-Circuit for GV2L and GV2LE + Thermal Overload Relay LRD or LR2K (3-Phase 400/415 V)

Dynamic Stress

$I_{peak} = f(\text{prospective Isc}) \text{ at } 1.05 U_e = 435 \text{ V}$




- 1 Maximum peak current
- 2 32 A
- 3 25 A
- 4 18 A
- 5 14 A
- 6 10 A
- 7 6.3 A
- 8 4 A
- 9 2.5 A
- 10 1.6 A
- 11 Limit of rated ultimate breaking capacity on short-circuit of GV2LE (14, 18, 23, and 25 A ratings).

Thermal Limit on Short-Circuit for GV2LE Only

Thermal Limit in kA^2s in the Magnetic Operating Zone

Sum of $I^2dt = f$ (prospective Isc) at $1.05 U_e = 435 V$

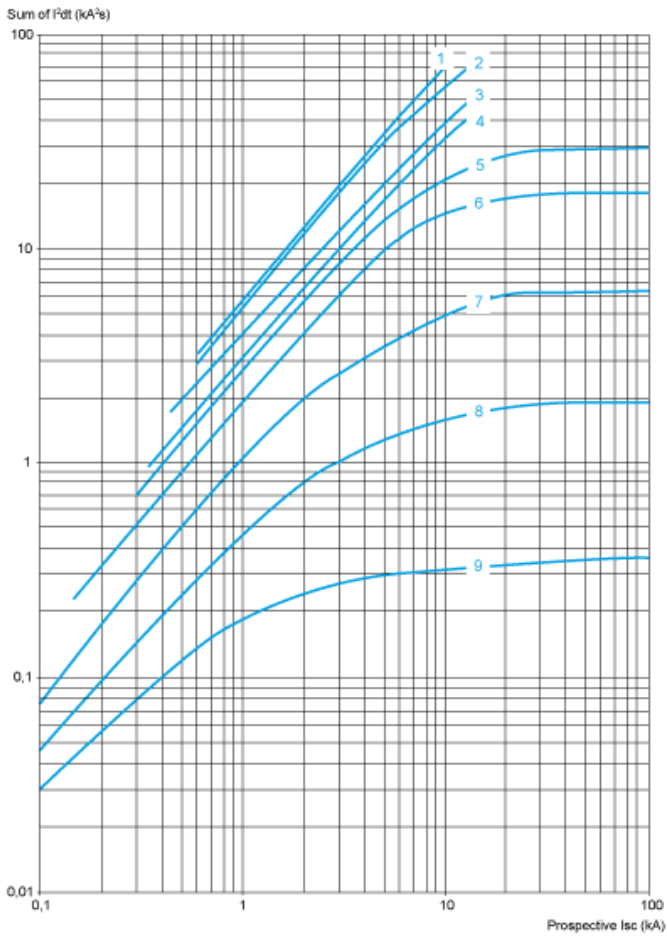


- 1 32 A
- 2 25 A
- 3 18 A
- 4 14 A
- 5 10 A
- 6 6.3 A
- 7 4 A
- 8 2.5 A
- 9 1.6 A

Thermal Limit on Short-Circuit for GV2L and GV2LE + Thermal Overload Relay LRD or LR2K

Thermal Limit in kA^2s in the Magnetic Operating Zone


Sum of $I^2dt = f$ (prospective Isc) at $1.05 U_e = 435 \text{ V}$

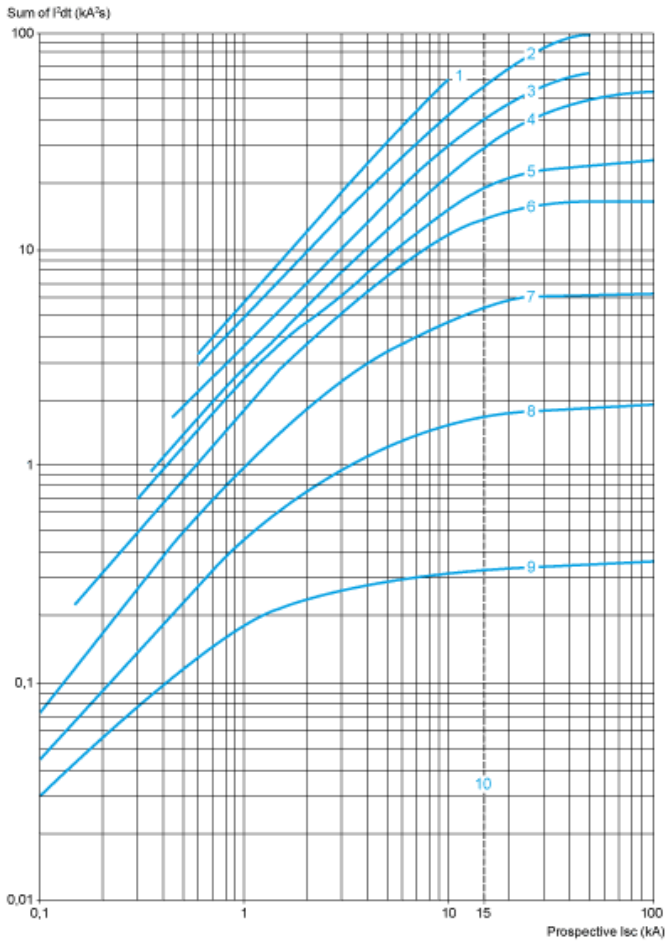

- 1 32 A (GV2LE32)
- 2 25 A and 32 A (GV2L32)
- 3 18 A
- 4 14 A
- 5 10 A
- 6 6.3 A
- 7 4 A
- 8 2.5 A
- 9 1.6 A
- 10 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23, and 25 A ratings).


GV2LE

Dimensions

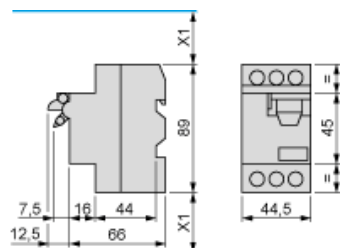


X1 Electrical clearance = 40 mm for $U_e \leq 690$ V.

GVAD, AM, AN, AU, AS

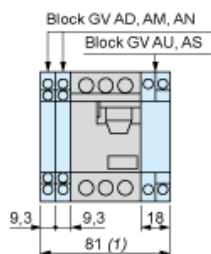


1 Maximum

GVAE

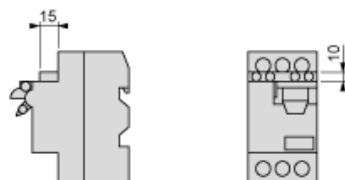


Mounting

On 35 mm rail




$c = 80$ on AM1 DP200 (35 x 7.5) and 88 on AM1 DE200, ED200 (35 x 15)


On panel with adapter plate GV2 AF02

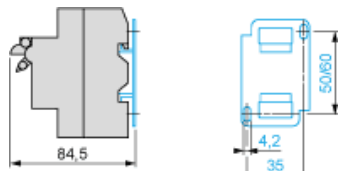


On pre-slotted plate AM1 PA




On rails DZ5 MB201



Mounting of External Operator GV2AP03 for GV2LE

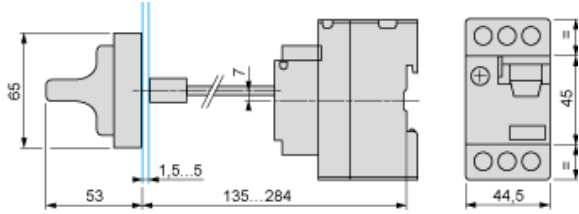


Door cut-out

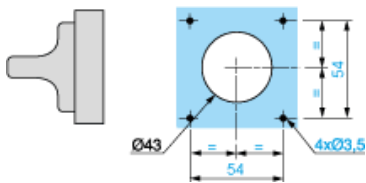

GV2L and GV2LE

Sets of busbars GV2G445, GV2G454, GV2G472, with terminal block GV2G05

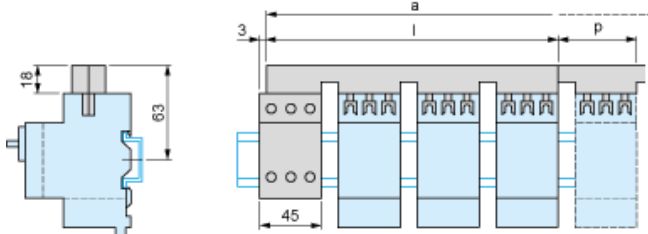


| | l | p |
|---------------------|-----|----|
| GV2G445 (4 x 45 mm) | 179 | 45 |
| GV2G454 (4 x 54 mm) | 206 | 54 |
| GV2G472 (4 x 72 mm) | 260 | 72 |


| Number of tap-offs | a | | | |
|--------------------|-----|-----|-----|-----|
| | 5 | 6 | 7 | 8 |
| GV2G445 | 224 | 269 | 314 | 359 |
| GV2G454 | 260 | 314 | 368 | 422 |
| GV2G472 | 332 | 404 | 476 | 548 |

Sets of Busbars for GV2L and GV2LE

Sets of busbars GV2G... with terminal block GV1G09

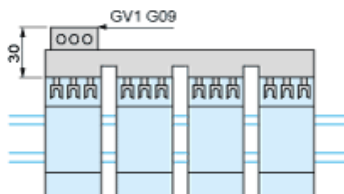


Sets of busbars GV2G245, GV2G254, GV2GR272




| | l |
|---------------------|----|
| GV2G245 (2 x 45 mm) | 89 |

| | |
|---------------------|-----|
| | I |
| GV2G254 (2 x 54 mm) | 98 |
| GV2G272 (2 x 72 mm) | 116 |

Set of busbars GV2G554

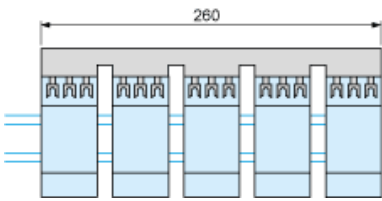

Sets of busbars GV2G345 and GV2G354



| | |
|---------------------|-----|
| | I |
| GV2G345 (3 x 45 mm) | 134 |
| GV2G354 (3 x 54 mm) | 152 |

GV2LE••

