


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION

Order code: 64966
 Description: LED/BR30/S2/8W/40K/STD
 UPC: 69549649668
 Case quantity: 24

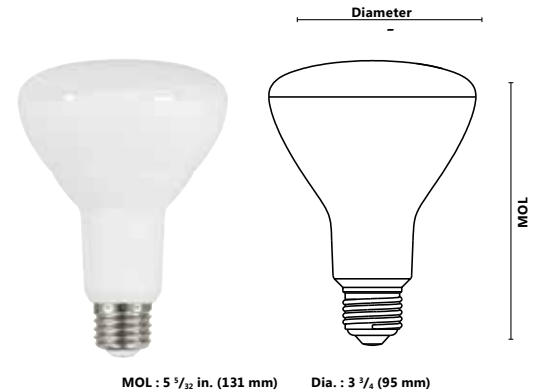

PERFORMANCE DATA

Shape: BR30
 Wattage (W): 8
 Base: E26
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 4 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 700
 Initial lumens per watt (lm/W): 88
 CRI: 82
 Beam angle (°): 105
 Power factor: 0.89
 Operating temperature range: -20 °C / -4 °F to 45 °C / 113 °F

DIMMER COMPATIBILITY LIST

Cooper	AAL06, DAL06P, SLC03P
Leviton	6615, 6674, IPE04-1LZ, IPL06
Lutron	AYCL-253P, DVELV-300P, NTELV-600, SELV-300P

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.