

**ACT20P-CI-CO-ILP-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Similar to illustration****ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

**General ordering data**

Version	Passive isolator, Input : 0(4)-20 mA, (loop powered), Output : 0(4)-20 mA, Signal converter/isolator, Input current loop feed
Order No.	<a href="#">7760054123</a>
Type	ACT20P-CI-CO-ILP-S
GTIN (EAN)	6944 169656637
Qty.	1 pc(s).

**ACT20P-CI-CO-ILP-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	114 mm	Depth (inches)	4.488 inch
Height	117.2 mm	Height (inches)	4.614 inch
Width	12.5 mm	Width (inches)	0.492 inch
Net weight	100 g		

**Temperatures**

Storage temperature	-40 °C...85 °C	Operating temperature	-20 °C...60 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	5...95 %, no condensation

**Probability of failure**

SIL in compliance with IEC 61508	None
----------------------------------	------

**Input**

Input current	0(4)...20 mA current loop	Number of inputs	1
Sensor	4-wire sensor (with own power supply), Current source	Voltage drop, current input	3.8 V

**Output**

Load impedance current	≤ 600 Ω	Number of outputs	1
Output current	0...20 mA (if input: 0...20 mA), 4...20 mA (if input: 4...20 mA)	Type	active, connected control must be passive

**Output (digital)**

Max. switching voltage, AC	0 V	Max. switching voltage, DC	0 V
Rated switching current	0.1 A		

**General data**

Accuracy	<0.1 % of end value	Configuration	none
Galvanic isolation	2-way isolator	Protection degree	IP20
Rail	TS 35	Step response time	≤ 1 ms
Temperature coefficient	≤ 100 ppm/K	Voltage supply	Loop powered, via 4...20 mA input

**Insulation coordination**

EMC standards	EN 61326-1, EN 61000-6-2, EN 61000-6-4	Galvanic isolation	2-way isolator
Impulse withstand voltage	3 kV (1.2/50µs)	Insulation voltage	2.5 kV (input / output)
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

**Data for Ex applications (ATEX)**

Marking	II 3 G Ex ec IIC T6 Gc
---------	------------------------

**ACT20P-CI-CO-ILP-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

**Classifications**

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ETIM 9.0	EC002653
ECLASS 9.0	27-21-01-20	ECLASS 9.1	27-21-01-20
ECLASS 10.0	27-21-01-20	ECLASS 11.0	27-21-01-20
ECLASS 12.0	27-21-01-20	ECLASS 13.0	27-21-01-20
ECLASS 14.0	27-21-01-20		

**Environmental Product Compliance**

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

**Important note**

Product information	The ACT20P-CI-CO-ILP-S fixed passive isolators isolate analogue standard current source signals. An analogue input current signal is converted linear and galvanic isolated into an analogue output current signal. The device is powered via the input current loop. Features • Galvanic 2-way isolation (single-channel device) between input and output.
---------------------	---

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURusEX)	E338066
Certificate no. (cULus)	E469563

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">ATEX Certification</a> <a href="#">IECEX Certification</a> <a href="#">UL Certification (hazardous location)</a> <a href="#">UL Certification (US-CAN)</a> <a href="#">UL certification (hazardous locations) for canada</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

Creation date November 26, 2024 11:51:57 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

3


**ACT20P-CI-CO-ILP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

**Connection diagram**

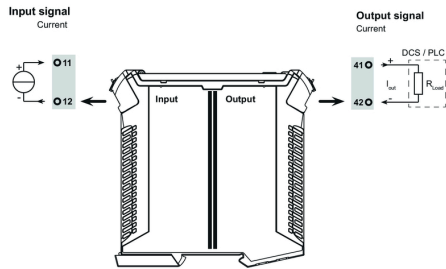

**Dimensioned drawing**

