


Product data sheet

Characteristics

VW3A7606R20

braking resistor - 72 ohm - 200 W - cable 2 m - IP65

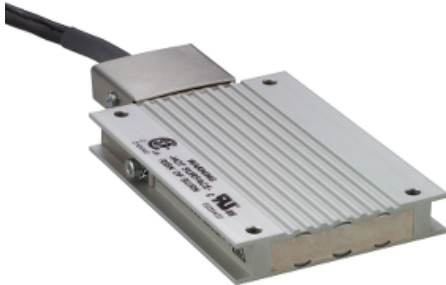

Main

Range of product	Altivar Lexium
Product or component type	Braking resistor
Range compatibility	Lexium 32i Lexium 15 Lexium 28 Lexium 05 Lexium 52 Lexium 32 Easy Lexium 16
Product compatibility	Motion servo drive LXM16D 0.1 kW, 200...230 V, single phase Motion servo drive LXM16D 0.2 kW, 200...230 V, single phase Motion servo drive LXM16D 0.4 kW, 200...230 V, single phase Motion servo drive LXM16D 0.75 kW, 200...230 V, single phase Motion servo drive LXM16D 1 kW, 200...230 V, single phase Motion servo drive LXM16D 1.5 kW, 200...230 V, single phase
Ohmic value	72 Ohm
Continuous power	200 W
Cable length	6.56 ft (2 m)

Complementary

Energy peak	6000 J 480 V 6600 J 400 V 9600 J 230 V 14600 J 115 V
Protection type	Thermal protection via the servo drive
Net weight	2.38 lb(US) (1.08 kg)

Environment

Ambient air temperature for operation	32...122 °F (0...50 °C)
Ambient air temperature for storage	-13...185 °F (-25...85 °C)
IP degree of protection	IP65
IP degree of protection	IP65

Packing Units

Package 1 Weight	2.20 lb(US) (1.000 kg)
Package 1 Height	0.450 dm
Package 1 width	4.000 dm
Package 1 Length	1.300 dm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration

Contractual warranty

Warranty	18 months
----------	-----------