


Product data sheet

Characteristics

8910DPA34V02U1

Contacteur, Definite Purpose, 30A, 4 pole, 20HP at 575VAC, 3 phase, 110/120VAC 50/60Hz coil, open, UL Listed

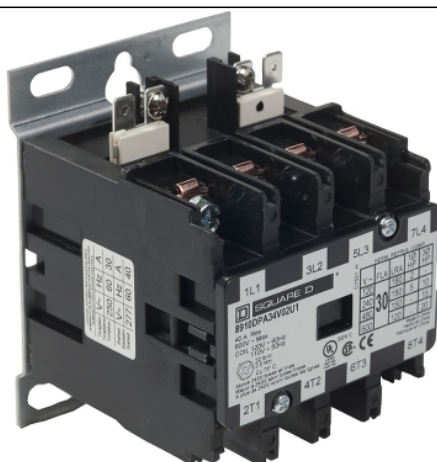

Main

| | |
|---------------------------|----------------------------|
| Product or Component Type | Definite Purpose Contactor |
| Line Rated Current | 30 A |
| Number of Poles | 4P |
| Pole contact composition | 4 NO |
| Range of Product | DPA |

Complementary

| | |
|--------------------------------|---|
| Maximum Horse Power Rating | 2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase |
| Locked rotor rated current | 150 A 460 V AC 120 A 575 V AC 180 A 277 V AC |
| [Ue] rated operational voltage | 600 V AC |
| [Uc] control circuit voltage | 120 V AC 60 Hz 110 V AC 50 Hz |
| Phase | 3 phase |
| Electrical Connection | Binder head |

Environment

| | |
|------------------------|----------------------|
| Product Certifications | UL Listed[RETURN]CSA |
|------------------------|----------------------|

Ordering and shipping details

| | |
|-------------------|---------------------------|
| Category | 21343-8910 DPA 3_(30 AMP) |
| Discount Schedule | CP1B |
| GTIN | 785901159834 |
| Returnability | Yes |
| Country of origin | CN |

Packing Units

| | |
|------------------------------|----------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.30 in (8.382 cm) |
| Package 1 Width | 3.30 in (8.382 cm) |
| Package 1 Length | 4.20 in (10.668 cm) |
| Package 1 Weight | 20.32 oz (576.062 g) |

Offer Sustainability

| | |
|----------------------------|--|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant with Exemptions |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|