


ORDERING INFORMATION

Order code: 61131
 Description: E232T8IS120-277/L/AS
 UPC: 69549611313

| Lamp type | Number of lamps | Rated lamp watts | Min. start temp. (°F / °C) | Input current (A) | Input power (ANSI watts) | Ballast factor | Max THD (%) | Power factor | Max. lamp current crest factor | B.E.F. |
|------------------|-----------------|------------------|----------------------------|-------------------|--------------------------|----------------|-------------|--------------|--------------------------------|--------|
| 277 VOLTS | | | | | | | | | | |
| F32T8 (32W) | 2 | 32 | 0/-18 | 0.17 | 47 | 0.77 | 10 | 0.98 | 1.7 | 1.64 |
| F32T8/ES (30W) | 2 | 30 | 0/-18 | 0.17 | 46 | 0.77 | 10 | 0.98 | 1.7 | 1.67 |
| F32T8/ES (28W) | 2 | 28 | 0/-18 | 0.16 | 43 | 0.77 | 10 | 0.98 | 1.7 | 1.79 |
| F32T8/ES (25W) | 2 | 25 | 0/-18 | 0.14 | 38 | 0.78 | 10 | 0.98 | 1.7 | 2.05 |
| F25T8 (25W) | 2 | 25 | 0/-18 | 0.14 | 39 | 0.78 | 10 | 0.98 | 1.7 | 2.00 |
| F17T8 (17W) | 2 | 17 | 0/-18 | 0.10 | 27 | 0.85 | 10 | 0.98 | 1.7 | 3.15 |
| LED22T8 (22W) | 2 | 22 | 0/-18 | 0.31 | 37 | - | 10 | 0.99 | - | - |
| LED18T8 (18W) | 2 | 18 | 0/-18 | 0.25 | 30 | - | 10 | 1.00 | - | - |
| F32T8 (32W) | 1 | 32 | 0/-18 | 0.11 | 31 | 0.90 | 10 | 0.98 | 1.7 | 2.90 |
| F32T8/ES (30W) | 1 | 30 | 0/-18 | 0.11 | 28 | 0.90 | 10 | 0.98 | 1.7 | 3.21 |
| F32T8/ES (28W) | 1 | 28 | 0/-18 | 0.10 | 26 | 0.90 | 10 | 0.98 | 1.7 | 3.46 |
| F32T8/ES (25W) | 1 | 25 | 0/-18 | 0.09 | 24 | 0.90 | 10 | 0.98 | 1.7 | 3.75 |
| F25T8 (25W) | 1 | 25 | 0/-18 | 0.09 | 24 | 0.90 | 10 | 0.98 | 1.7 | 3.75 |
| F17T8 (17W) | 1 | 17 | 0/-18 | 0.07 | 18 | 0.90 | 10 | 0.98 | 1.7 | 5.00 |
| F40T8 (40W) | 1 | 40 | 0/-18 | 0.13 | 36 | 0.88 | 10 | 0.98 | 1.7 | 2.44 |
| LED22T8 (22W) | 1 | 22 | 0/-18 | 0.20 | 23 | - | 10 | 1.00 | - | - |
| LED18T8 (18W) | 1 | 18 | 0/-18 | 0.16 | 19 | - | 10 | 0.99 | - | - |

WIRING DIAGRAM

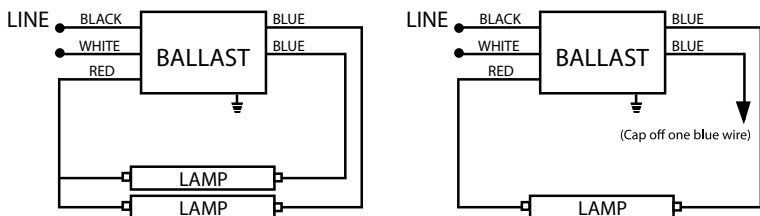


LEADS LENGTH

| | |
|-------|--------------------|
| Black | 25.00" (63.50 cm) |
| White | 25.00" (63.50 cm) |
| Blue | 31.00" (78.74 cm) |
| Red | 46.00" (116.84 cm) |

BALLAST DIMENSIONS

| | |
|---------------|------------------|
| Length (L): | 9.50" (24.10 cm) |
| Width (W): | 1.30" (3.30 cm) |
| Height (H): | 1.00" (2.54 cm) |
| Mounting (M): | 8.91" (22.63 cm) |

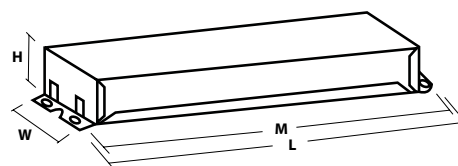

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 9, 2015