


GVAED1013

Add-on contact block, TeSys Deca Frame
2/3, 1NO+1NO(fault), front, spring terminal, for
GV2/GV3(except GV3ME)

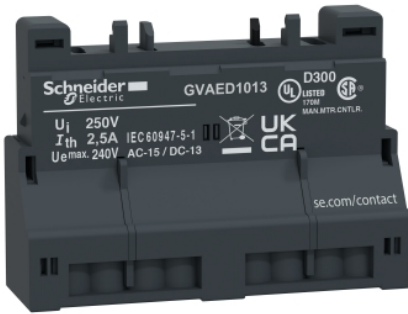

Main

Range	TeSys TeSys Deca
Device short name	GVAED
Product or Component Type	Auxiliary contact block
Product Compatibility	GV3L GV3P
Mounting Location	Front side
Auxiliary contacts operation	Fault signal 1 NO
Pole contact composition	2 NO
Quantity per Set	Set of 1

Complementary

[Ui] rated insulation voltage	600 V UL 508 690 V IEC 60947-1 600 V CSA C22.2 No 14
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GB2CB... circuit breaker GG fuse 10 A
Rated operational power in VA	300 VA 48 V AC-15 100000 cycles 400 VA 690 V AC-15 100000 cycles 500 VA 110...127 V AC-15 100000 cycles 500 VA 500 V AC-15 100000 cycles 650 VA 440 V AC-15 100000 cycles 720 VA 230...240 V AC-15 100000 cycles 850 VA 380...415 V AC-15 100000 cycles
Rated operational power in W	120 W 240 V DC-13 100000 cycles 140 W 110 V DC-13 100000 cycles 140 W 24 V DC-13 100000 cycles 180 W 60 V DC-13 100000 cycles 240 W 48 V DC-13 100000 cycles
Height	0.51 in (13 mm)
Width	1.75 in (44.5 mm)
Depth	1.24 in (31.5 mm)
Net Weight	0.11 lb(US) (0.05 kg)
Color	Dark grey

Environment

Environmental characteristic	Normal environment
Product Certifications	UKCA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.20 in (0.5 cm)
Package 1 Width	1.77 in (4.5 cm)
Package 1 Length	1.18 in (3.0 cm)
Package 1 Weight	0.71 oz (20.0 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	2.56 in (6.5 cm)
Package 2 Width	2.95 in (7.5 cm)
Package 2 Length	4.72 in (12.0 cm)
Package 2 Weight	7.23 oz (205.0 g)
Unit Type of Package 3	S02
Number of Units in Package 3	220
Package 3 Height	5.91 in (15.0 cm)
Package 3 Width	11.81 in (30.0 cm)
Package 3 Length	15.75 in (40.0 cm)
Package 3 Weight	10.95 lb(US) (4.965 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.