

### Main

Range of Product	Modicon X80
Accessory / separate part type	Rack

### Complementary

Number of slots	8 bus X + Ethernet
Product Compatibility	I/O module BMX processor Specific application module BMXCPS power supply BME processor
Power consumption in W	211 MW 3.3 V DC 3.9 W 24 V DC
Electrical connection	1 connector (XBE) expansion module
Fixing mode	By 4 screws 0.17...0.25 in (4.32...6.35 mm) panel By 4 M6 screws plate By clips 35 mm symmetrical DIN rail
Current consumption	64 mA 3.3 V DC 164 mA 24 V DC
MTBF reliability	1297516 H
Net Weight	2.34 lb(US) (1.06 kg)

### Environment

IP Degree of Protection	IP20
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Relative Humidity	5...95 % without condensation
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

### Ordering and shipping details

Category	18160-MODICON M340
Discount Schedule	PC34
GTIN	3595864174068
Returnability	Yes
Country of origin	FR

### Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.68 in (6.800 cm)
Package 1 Width	6.10 in (15.500 cm)
Package 1 Length	18.11 in (46.000 cm)

Package 1 Weight	2.28 lb(US) (1.032 kg)
Unit Type of Package 2	S04
Number of Units in Package 2	9
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	15.75 in (40.000 cm)
Package 2 Length	23.62 in (60.000 cm)
Package 2 Weight	22.49 lb(US) (10.200 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	36
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	116.85 lb(US) (53.000 kg)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions

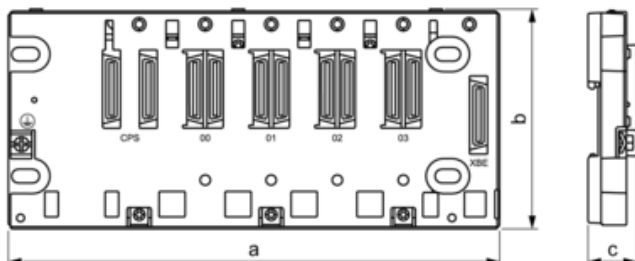

Dimensions in mm

a		b	c
Empty Rack	Rack With Extender Module Mounted		
372.8	373.98	105.11 NOTE: Overall height is 134.6 with a CPU mounted.	19

Dimensions in in.


a		b	c
Empty Rack	Rack With Extender Module Mounted		
14.68	14.72	4.14 NOTE: Overall height is 5.30 with a CPU mounted.	0.75

---

## Minimum Clearance

---

Minimum Clearance of a typical installation in a cabinet with ducts

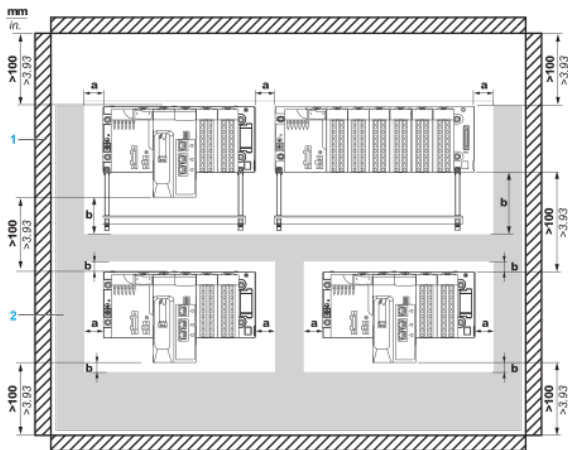

a Side clearance: > 40 mm (1.57 in.)

b Top and bottom clearance with surrounding objects: > 20 mm (0.79 in.)


1 Installation or casing

2 Wiring duct or tray

---

## Mounting a Rack on a DIN rail


---



---

## Mounting and Fastening the Rack on Panels

---

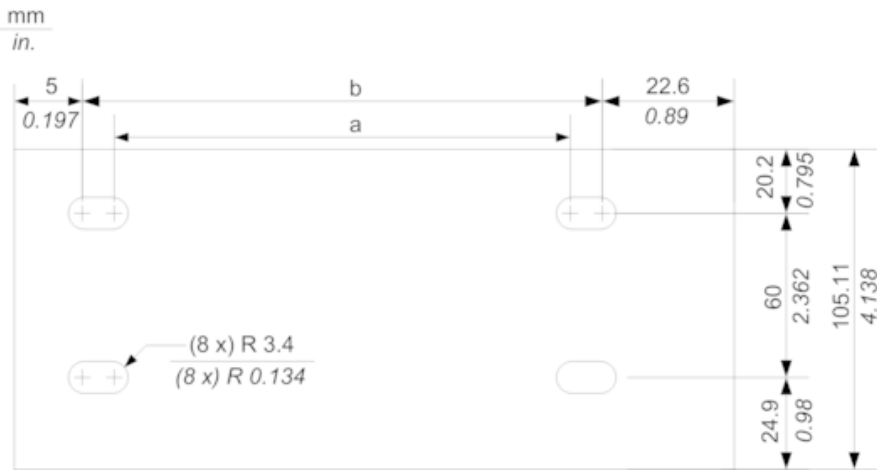

NOTE: You can use M4, M5, M6, or UNC #6 screws in the fastening holes.


Dimensions in mm

a	b
332.5	345.2

Dimensions in in.

a	b
13.09	13.59

### Mounting on Telequick Grid AM1-PA and AM3-PA Mounting Grids

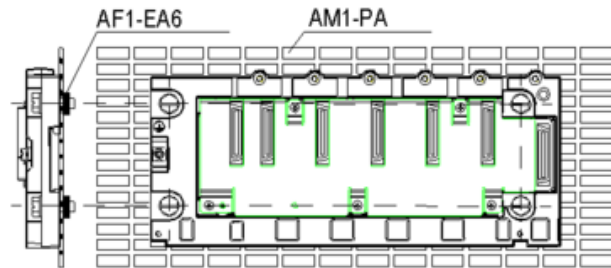

Fasten the rack with four M4, M5, M6 or UNC #6 screws