


Galvanized Rigid Conduit (GRC) and Kwik-Couple™ GRC

Galvanized Rigid Conduit (GRC)

- Hot-dip galvanized for excellent corrosion resistance
- High strength ductile steel for long life and easy bending
- Smooth, continuous raceways for fast wire pulling
- Kwik-Release End Cap to protect threads
- True Color™ GRC special orders available
- CSA Certified to Safety Standard C22.2 No.45.1
- Manufactured in accordance with ANSI C80.1
- Available in sizes 1/2 (16) - 6 (155)

Quality, Long Lasting Heavy Duty Steel Conduit

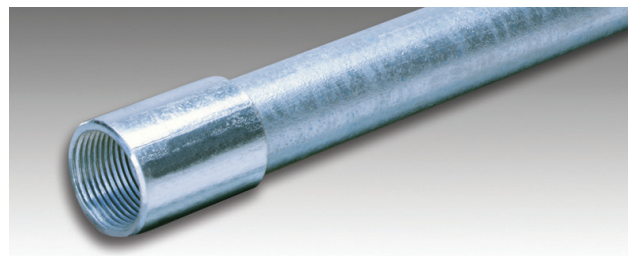

For Faster Installations Use the Kwik-Couple GRC Connection



* U.S. Patent Numbers 7,404,582 and 7,726,001.

Kwik-Couple Galvanized Rigid Conduit (GRC)

- Similar benefits to GRC Conduit*
- Factory installed Kwik-Couple™ couplings are available on GRC conduit

Just line up the ends, spin the coupling forward onto the next piece and wrench tighten. It's that easy!

- No separate couplings to purchase, inventory or install
- Kwik-Release End Cap to protect threads
- True Color Kwik-Couple GRC special orders available
- CSA Certified to Safety Standard C22.2 No.45.1 & C22.2 No.18.3
- Manufactured in accordance with ANSI C80.1
- Available in sizes 2 1/2 (63) - 5 (129)

*Kwik-Couple GRC does not contain a certification for wet locations

Kwik-Couple Rigid Elbows

- Also available with pre-installed Kwik-Couple Couplings
- Made to order, contact us for lead times

Galvanized Rigid Conduit (GRC)

CSA Certified to Safety Standard C22.2 No.45.1

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Outside Diameter ¹		Nominal Wall Thickness ²		Approximate Weight Per 100 Ft. (30.5M)		Bundle Quantity	
		in	mm	in	mm	lb	kg	ft	m
1/2	16	0.840	21.34	0.104	2.64	82	37.2	1000	304.8
3/4	21	1.050	26.67	0.107	2.72	109	49.4	1000	304.8
1	27	1.315	33.40	0.126	3.20	161	73.0	500	152.4
1 1/4	35	1.660	42.16	0.133	3.38	218	98.9	250	76.2
1 1/2	41	1.900	48.26	0.138	3.51	263	119.3	250	76.2
2	53	2.375	60.33	0.146	3.71	350	158.8	200	61.0
2 1/2	63	2.875	73.03	0.193	4.90	559	253.6	100	30.5
3	78	3.500	88.90	0.205	5.21	727	329.8	100	30.5
3 1/2	91	4.000	101.60	0.215	5.46	880	399.2	100	30.5
4	103	4.500	114.30	0.225	5.72	1030	467.2	100	30.5
5	129	5.563	141.30	0.245	6.22	1520	689.5	100	30.5
6	155	6.625	168.28	0.266	6.76	1785	809.7	100	30.5

Project Information

Company Name: _____

Address: _____

City: _____

State & Zip: _____

Phone: _____

Project Name: _____

City: _____

State: _____

¹ Outside diameter tolerances: Size 1/2 (16) to 1 1/2 (41) +/- 0.015" (0.38mm); 2 (53) to 6 (155) +/- 1%

Each length of conduit with coupling attached will be nominally 10' (3.05m)

² For information only. Not a requirement of the CSA Standard.

NOTE: Special orders are non-cancelable, non-returnable and non-refundable