

Product data sheet

Characteristics

XZCRA151164D5

jumper cable XZ - male straight M12 5-pin -
female straight M12 5-pin - PVC 5m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 5 pins straight screw-on and clip-on
Jumper cable end 2	M12 female 5 pins straight screw-on and clip-on
Collar material	Metal
Cable composition	5 x 0.34 mm ²
Cable length	16.40 ft (5 m)
Cable outer diameter	0.22 in (5.7 mm)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.57 lb(US) (0.26 kg)

Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	9.31 oz (264 g)
Package 1 Height	0.79 in (2 cm)
Package 1 width	6.30 in (16 cm)
Package 1 Length	6.30 in (16 cm)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

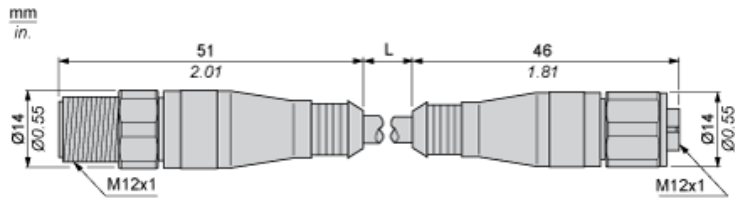

L : Length of cable

Connections and Schemes

