

OAC Commercial Wall Heater



Features

Color

- Standard: white, almond.
- Optional: metallic silver, bronze, metallic charcoal, textured black, beige-grey, aluminum, semi-gloss black (10% upcharge).
- Custom colors available upon request.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 120V, 208V, 240/208V, 277V, 347V, 480V, 600V, 1 or 3-phase.

Construction

- 18-gauge steel front cover. 1
- Bottom air outlet.
- High-limit temperature control with automatic reset.

Fan

- Closed, factory-lubricated motor. 2
- 160 cfm fan (single unit: 55 dBA); 2 X 160 cfm fan (double unit: 58 dBA); 3 X 160 cfm fan (triple unit: 61 dBA).
- Fan delay purges heater of residual heat.

Heating element

- Durable tubular heating element with fins. 3

Control

- Built-in thermostat included with control knob or tamperproof. 4
- 24V relay, with or without transformer available.

Note: Thermostat is not included in heater with factory installed relay. Any remote thermostat or relay must be connected to the heater control terminal block.

Installation


- Minimum clearance from the floor and adjacent walls: 10 in. (25.4 cm).
- Adaptor for surface mounting available. 5

Warranty

- 1-year warranty against defects.

Application

- Apartment building, commercial building, entrance way, stairwell, garage.

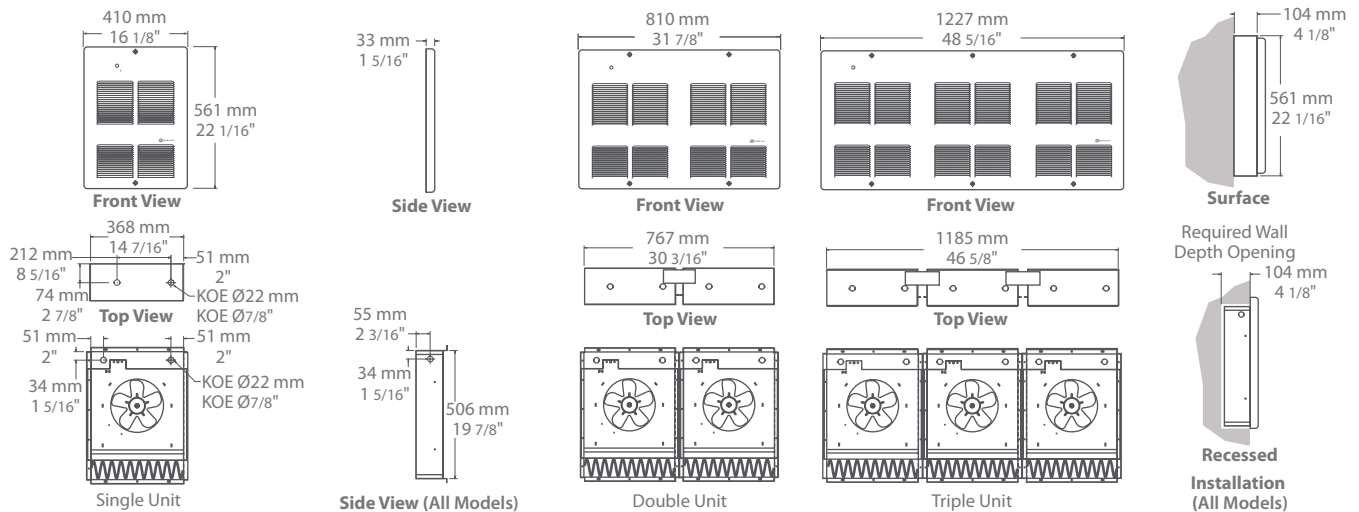

OAC

Models

Watts	Volts (ph)	Product # ¹	Unit	Weight	
				lb	kg
1500	120 (1)	OAC01502	single	24.0	10.9
2000	208 (1)	OAC02008	single	24.0	10.9
4000	208 (1)	OAC04008	single	24.0	10.9
4800	208 (1)	OAC04808	single	24.0	10.9
6000	208 (3)	OAC06038	triple	90.0	40.9
8000	208 (1)	OAC08008	double	50.0	22.7
9000	208 (3)	OAC09038	triple	90.0	40.9
12000	208 (1)	OAC12008	triple	90.0	40.9
12000	208 (3)	OAC12038	triple	90.0	40.9
1500/1125 ²	240/208 (1)	OAC01500	single	24.0	10.9
2000/1500 ²	240/208 (1)	OAC02000	single	24.0	10.9
3000/2250 ²	240/208 (1)	OAC03000	single	24.0	10.9
4000/3000 ²	240/208 (1)	OAC04000	single	24.0	10.9
4800/3600 ²	240/208 (1)	OAC04800	single	24.0	10.9
6000/4500 ²	240/208 (1)	OAC06000	double	50.0	22.7
8000/6000 ²	240/208 (1)	OAC08000	double	50.0	22.7
12000/9000 ²	240/208 (1)	OAC12000	triple	90.0	40.9
1500	347 (1)	OAC01507	single	28.0	12.7
2000	347 (1)	OAC02007	single	28.0	12.7
3000	347 (1)	OAC03007	single	28.0	12.7
4000	347 (1)	OAC04007	single	28.0	12.7
4800	347 (1)	OAC04807	single	28.0	12.7
6000	347 (1)	OAC06007	double	50.0	22.7
8000	347 (1)	OAC08007	double	50.0	22.7
12000	347 (1)	OAC12007	triple	90.0	40.9
1500	480 (1)	OAC01504	single	28.0	12.7
2000	480 (1)	OAC02004	single	28.0	12.7
3000	480 (1)	OAC03004	single	28.0	12.7
4000	480 (1)	OAC04004	single	28.0	12.7
4800	480 (1)	OAC04804	single	28.0	12.7
6000	480 (1)	OAC06004	double	50.0	22.7
8000	480 (1)	OAC08004	double	50.0	22.7
12000	480 (1)	OAC12004	triple	90.0	40.9
12000	480 (3)	OAC12034	triple	90.0	40.9
1500	600 (1)	OAC01506	single	28.0	12.7
2000	600 (1)	OAC02006	single	28.0	12.7
3000	600 (1)	OAC03006	single	28.0	12.7
4000	600 (1)	OAC04006	single	28.0	12.7
4800	600 (1)	OAC04806	single	28.0	12.7
6000	600 (1)	OAC06006	double	50.0	22.7
6000	600 (3)	OAC06036	triple	90.0	40.9
8000	600 (1)	OAC08006	double	50.0	22.7
9000	600 (3)	OAC09036	triple	90.0	40.9
12000	600 (1)	OAC12006	triple	90.0	40.9
12000	600 (3)	OAC12036	triple	90.0	40.9

Options

Product #	Description	Factory Installed	Kit
OAC-BS1	Surface mounting box, single unit	-	✓
OAC-BS2	Surface mounting box, double unit	-	✓
OAC-BS3	Surface mounting box, triple unit	-	✓
OAC-DIS20	Disconnect switch, double-pole, 20A at 277V and less	✓	✓
OAC-DIS40	Disconnect switch, triple-pole, 40A at 600V max.	✓	✓
OAC-DIS80	Disconnect switch, triple-pole, 80A at 600V max.	✓	✓
OAC-IV	Fan switch	✓	-
OAC-O/O	On/Standby heating switch	✓	-
OAC-R	24V control relay, without transformer	✓	-
OAC-RT	24V control relay with transformer	✓	-

¹ Built-in thermostat included.

² 208V = 75% of wattage at 240V.

Add "BL" for white, "AM" for almond. Optional colors shown in the color chart section (page 105) are available with a 10% upcharge.

For options available as factory installed and kit, if not mentioned on the order, will automatically be shipped as a kit.

277V available upon request.