

Product data sheet

Specifications



Flush mounting kit, Harmony XB5,
mounting kit 30mm for selector
switches and illuminated push
buttons 22mm, plastic, 2 line legend

ZB5AZ026

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Harmony XB5
Product or Component Type	Flush mounting kit
Accessory / separate part category	Mounting and fixing accessory
Product Compatibility	ZB5RZA0 ZB5AK ZB5AD.9 ZB5AA.6 ZB5AW ZB5RTA ZB5AJ ZB5AH..3 ZB5AD ZB5AD.8
Accessory / separate part destination	Selector switch high bezel Illuminated push-button high bezel

Complementary

Colour	Black
IP degree of protection	IP66 IEC 60529 front face) IP69 IEC 60529 front face) IP69K DIN 40050-9 front face)
IK degree of protection	IK03 conforming to IEC 50102
Mounting diameter	1.2 in (30.5 mm)
Quantity per Set	Set of 1

Ordering and shipping details

Category	US1CP1018079
Discount Schedule	CP10
GTIN	3606485440279
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	1.693 in (4.300 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Length	2.047 in (5.200 cm)
Package weight(Lbs)	0.600 oz (17.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	80
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	3.858 lb(US) (1.750 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Average percentage of recycled plastic content	24 %
Average percentage of recycled metal content	12 %
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions with Flush Mounting Kit

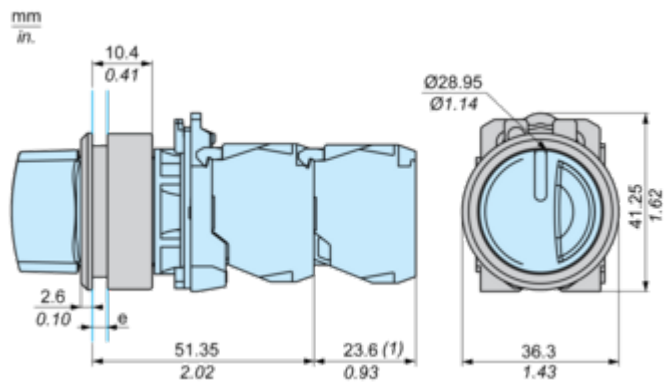

e : Clamping thickness : 1 to 3.5 mm / 0.04 to 0.14 in.
(1) Additional row of contatcs or double contact


Mounting and Clearance

Panel Cut-Out and Mounting

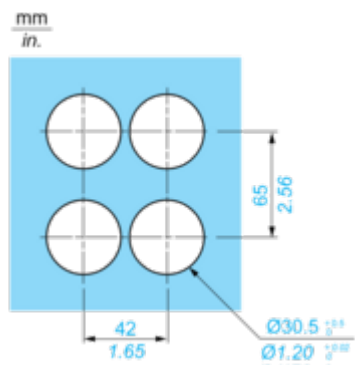

Technical Illustration

Dimensions

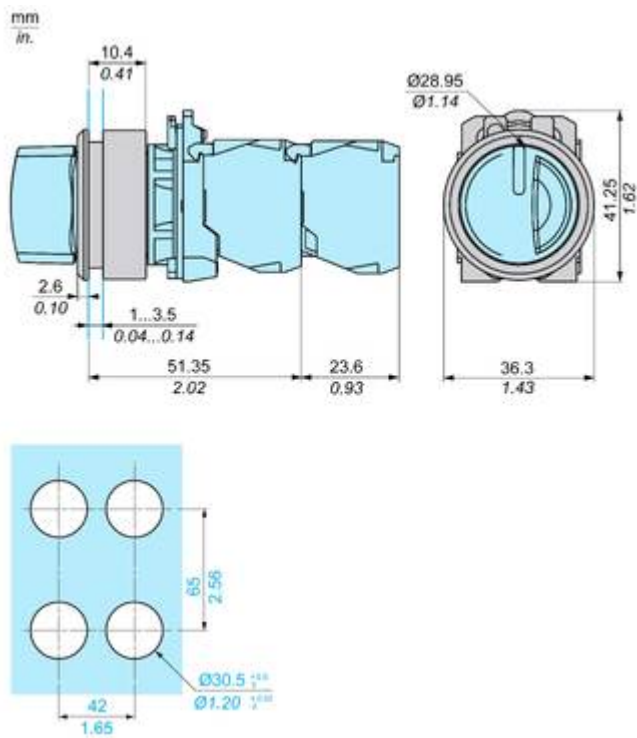

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Image of product / Alternate images

Alternative

