

# Silo Backlit WL-SILO-BL-BK

Wall Light



Product Finishes: ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 2

**Volt Amps:** 3

**Lumens:** 160

**Color Temp:** 2700k

**IP Rating:** 65

**CRI:** 93

**Light Source:** Integrated

**Material:** Polycarbonate

**Cable Length:** 24"

**Lux (lx):** 11

**Candelas (cd):** 43

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive


**Dimmable:** No

**Color-Changing:** No


## Product Uses:

Walls, Fences, Retaining

Walls, Pillars, Pergolas

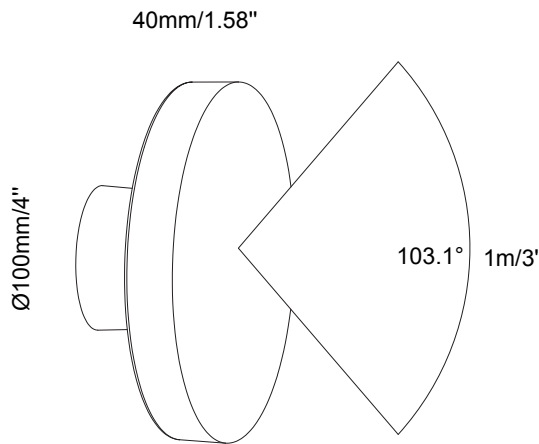

Max. Luminous intensity : 43 cd

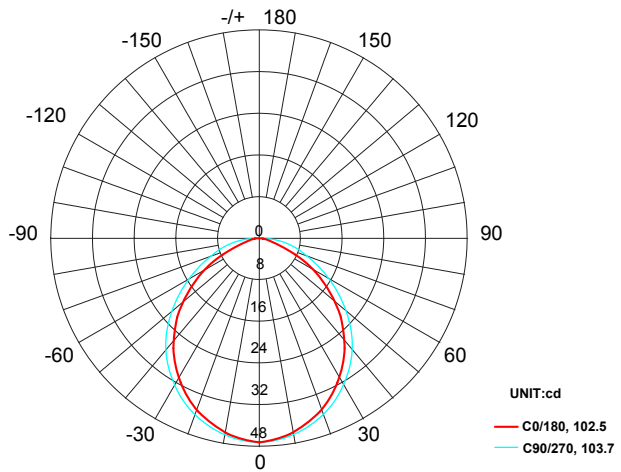

AVERAGE BEAM ANGLE (50%): 103.1 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	25.83/77.49		2.52
1.5	4.86/10.30		3.78
3	1.22/3.64		7.56
5	0.60/1.79		12.53
6.5	0.32/0.98		16.38

AVERAGE BEAM ANGLE 0/180 (50%): 103.1 DEG

