

RPSC

STEEL RUNNING MAN SIGN



The RPSC series is an entry-level steel commercial sign available in AC/DC and internally self-powered versions.

FEATURES & SPECIFICATIONS

CIRCUITRY - AC

- 120-347 VAC Input
- Emergency DC wattages as follows:
 6 VDC = 1 W, 12 VDC = 1 W, 24 VDC = 1 W

CIRCUITRY - SELF-POWERED

- 120-347 VAC Input
- Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger

MECHANICAL

- 20 gauge steel housing
- Universal faces
- Universal mounting : ceiling mount, wall mount, end mount
- White powder coat finish

APPROVALS

- CSA Certified to C22.2 #141-15

COMPLIANCE

- Meets requirement of ICES-005

OVERVIEW			
LIGHT SOURCE	LED	DC VOLTAGE (VDC)	6, 12, 24
INPUT VOLTAGE (VAC)	120-347	DC POWER (W)	0.9
INPUT POWER	1.9 W @ AC/DC (SINGLE OR DOUBLE FACE) 2W SELF-POWERED (SINGLE OR DOUBLE FACE)		
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> QUICKSHIP </div> <div style="text-align: center;"> LED </div> <div style="text-align: center;"> ICES 005 </div> <div style="text-align: center;"> Energy Verified Energie Vérifiée </div> </div>			

POWER CONSUMPTION TABLE

MODEL	VOLTAGE	POWER	CURRENT
RPSC-BAT1	120 V	2 W	0.044 A
	277 V	2 W	0.044 A
	347 V	2 W	0.044 A
RPSC-UNVDC	120 V	2 W	0.08 A
	277 V	2 W	0.08 A
	347 V	2 W	0.08 A

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

QUICK SHIP ORDERING GUIDE



PART NO	DC VOLTS (VDC)	NBR OF FACES	LIGHT SOURCE	INPUT VOLTS	COLOR
RPSC-BAT1	1B	UNIVERSAL	LED	120-347	WHITE
RPSC-UNVDC	UDC	UNIVERSAL	LED	120-347	WHITE

QUICK SHIP: Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

ACCESSORIES (ORDER SEPARATELY)



PART NUMBER	DIMENSIONS
FIBER-RPSC	RUNNING MAN FIBER NO ARROW

WIREGUARD¹

	PART NUMBER	DIMENSIONS
WALL MOUNT	WGD520-V2	15.75" X 11.5" X 4.5"
CEILING MOUNT	WGD540	14.5" X 6.25" X 10.5"
END MOUNT	WGD650-V2	17.75" X 17.75" X 16.50"

¹Please contact your Stanpro customer service representative for more information.

DIMENSIONS

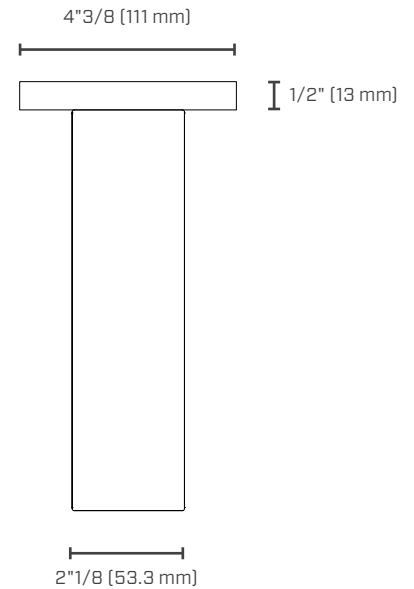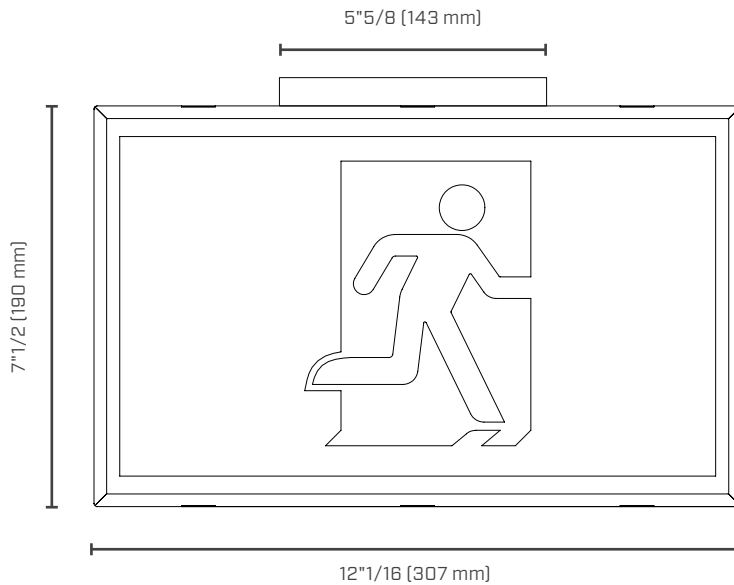

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, please order the RPSC along with the following fiber: FIBER-RPSC