

Product data sheet

Specifications



Single contact block with body fixing collar, Harmony XB5, plastic, 1 NO + 1 NC, compact push in terminals

ZB5AZ1055

Main

Range of product	Harmony XB5
Product or component type	Complete body/contact assembly
Device short name	ZB5
Fixing collar material	Plastic
Sale per indivisible quantity	1
Head type	Standard
Contacts type and composition	1 NO + 1 NC
Contact operation	Slow-break
Contact block type	Single
Connections - terminals	Push-in, <= 2 x 1.5 mm ² with wire end ferrule IEC 60947-1 Push-in, >= 1 x 0.34 mm ² without wire end ferrule IEC 60947-1

Complementary

CAD overall width	1.8 in (46.2 mm)
CAD overall height	1.09 in (27.6 mm)
CAD overall depth	1.2 in (30 mm)
Terminals description ISO n°1	(11-12)NC (13-14)NO
Product weight	0.035 lb(US) (0.016 kg)
Device composition	Fixing collar Body
Contacts usage	Standard contacts
Positive opening	With IEC 60947-5-1 appendix K
Operating travel	0.048 in (1.217 mm) NC changing electrical state) 0.08 in (2.05 mm) NO changing electrical state) 0.2 in (4.3 mm) total travel)
Operating force	2.25 N NC changing electrical state 2.45 N NO changing electrical state
Mechanical durability	10000000 cycles
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	10 A cartridge fuse gG IEC 60947-5-1
[Ith] conventional free air thermal current	10 A IEC 60947-5-1
[Ui] rated insulation voltage	300 V 3)IEC 60947-1
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ie] rated operational current	6 A 120 V, AC-15, A300 IEC 60947-5-1 3 A 240 V, AC-15, A300 IEC 60947-5-1 0.55 A 125 V, DC-13, Q300 IEC 60947-5-1 0.27 A 250 V, DC-13, Q300 IEC 60947-5-1
Device presentation	Basic sub-assemblies

Environment

Protective treatment	TH
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
IP degree of protection	IP20 IEC 60529
Standards	IEC 60947-1 IEC 60947-5-1 IEC 60947-5-4 IEC 60947-5-5 UL 60947-1 UL 60947-5-1 UL 60947-5-5 UL 1059 UL 486E CSA C22.2 No 60947-1 CSA C22.2 No 60947-5-1 CSA C22.2 No 158 CSA C22.2 No 65 IACS E10
Product certifications	EAC IECEE CB Scheme CCC UL CSA
Vibration resistance	5 gn (f= 10...500 Hz) conforming to IEC 60068-2-6 25 mm peak to peak (f= 2...10 Hz) conforming to IEC 60068-2-6
Shock resistance	25 gn 6 ms) 1000 shocks on each axis IEC 60068-2-27 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.772 in (4.500 cm)
Package 1 Width	1.378 in (3.500 cm)
Package 1 Length	2.165 in (5.500 cm)
Package 1 Weight	0.776 oz (22.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	250
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	12.807 lb(US) (5.809 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.2 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.2 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.

Use Better



Materials and Substances

Average percentage of recycled plastic content	24 %
Average percentage of recycled metal content	12 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions




Mounting and Clearance

Mounting

Mounting and Unmounting

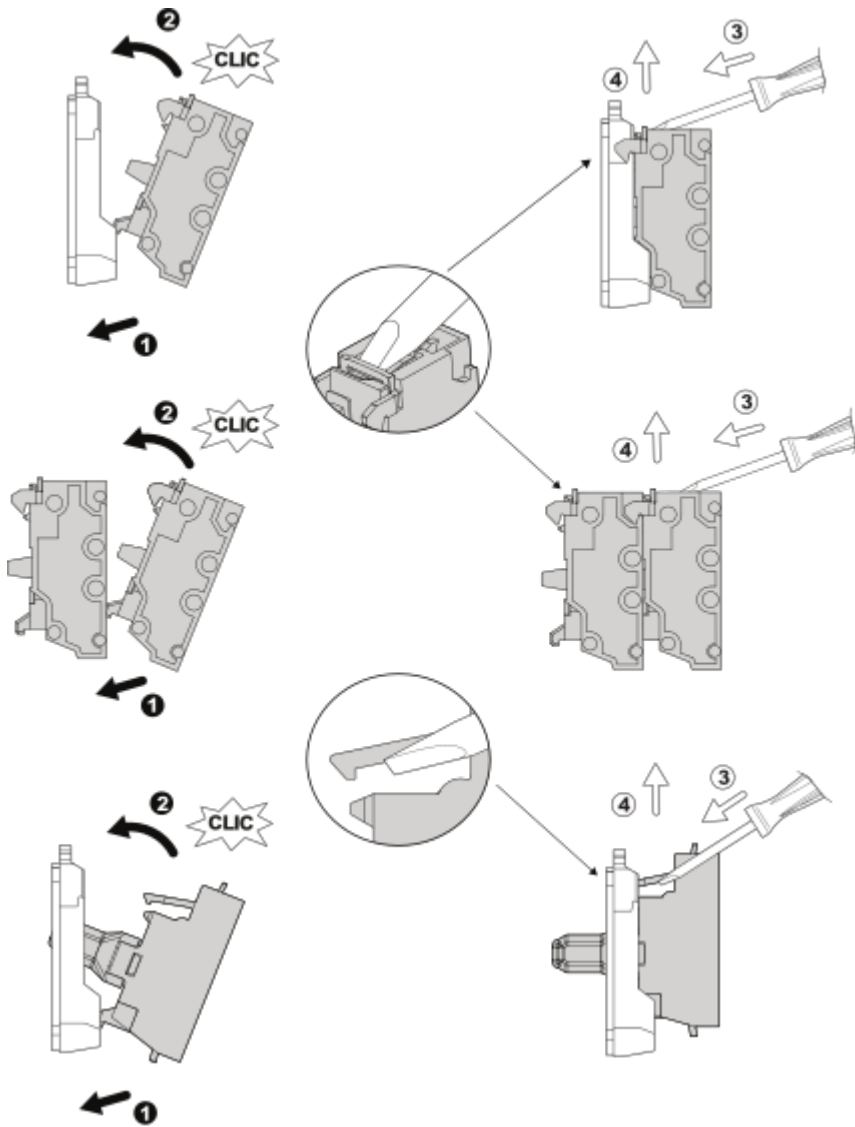

Panel cut-out Dimension

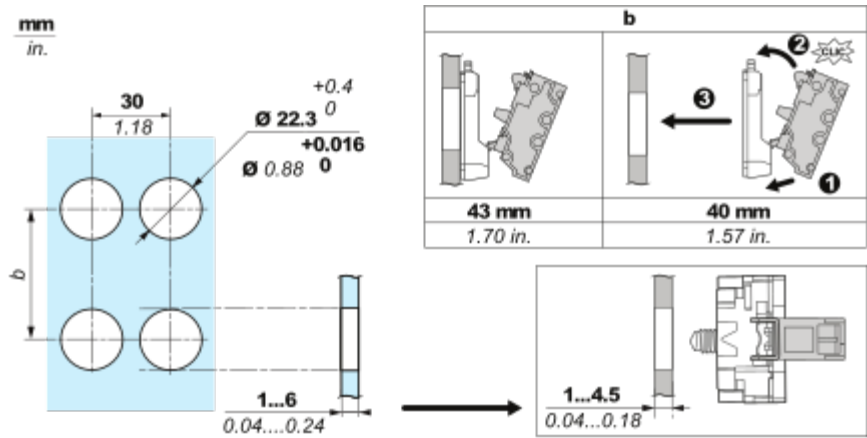



Connections and Schema

Wiring




Wiring and Unwiring



mm in.	8 0.32
mm² AWG	0.34...1.5 22...16

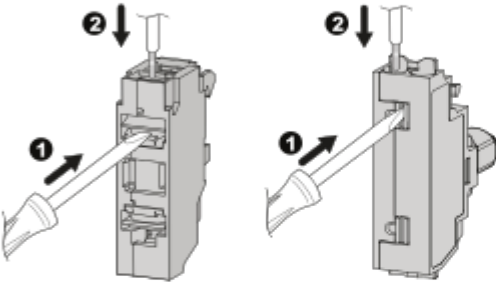


mm in.	8 0.32	8 0.32	8 0.32
mm² AWG	0.34...1.5 22...16	0.34...1 22...18	0.34...1.5 22...16

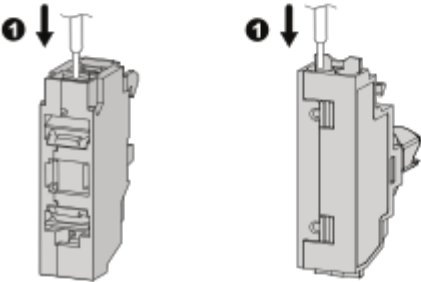


Technical Illustration

Dimensions

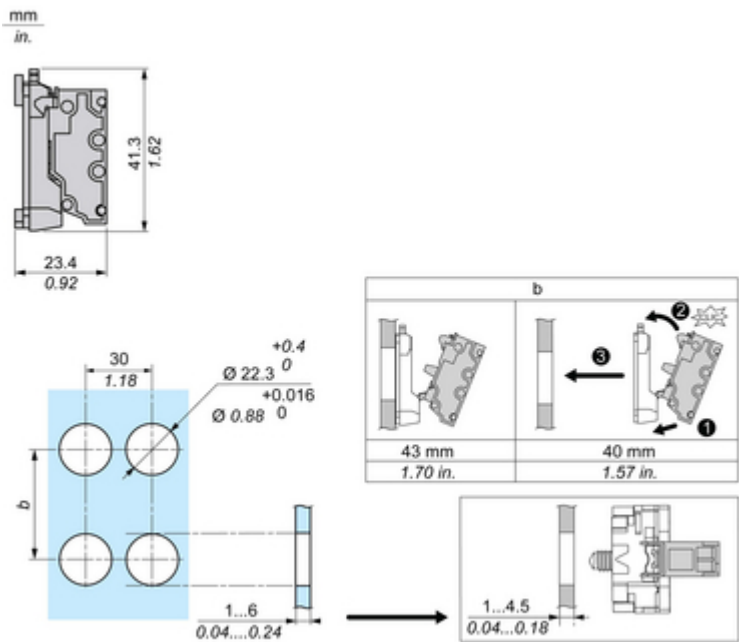

Technical Illustration

Wiring diagram

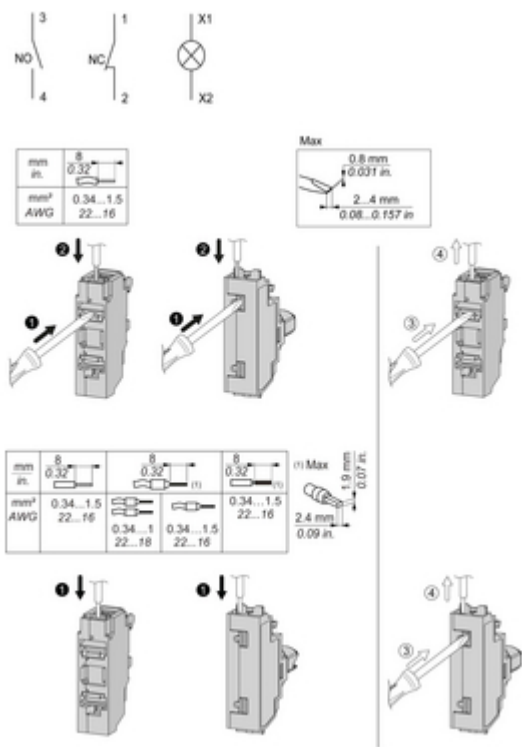


Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB4/XB5 Compact Push-in blocks

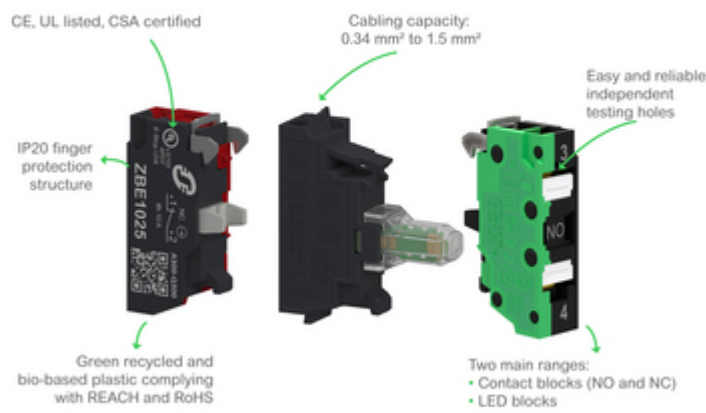

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4/XB5 Compact Push-in blocks



37% thinner than a standard block



Installation costs saved through reduced wiring time and effort



Fully compatible with current Harmony offer



Available as single block, sub-assemblies and complete units (both plastic and metal ranges)



Simplified inventory management




Offer Marketing Illustration

Product benefits / Features

Avantages techniques

Harmony XB4/XB5 Blocs Push-in compacts

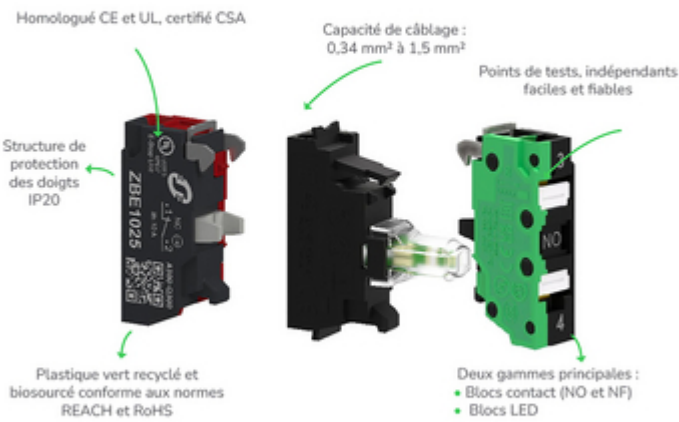

Offer Marketing Illustration

Product benefits / Features

Caractéristiques

Harmony XB4/XB5 Compact Push-in Blocks



37% plus fin qu'un bloc standard



Coûts d'installation réduits grâce au gain de temps et d'effort du câblage



Entièrement compatible avec l'offre Harmony XB4 / XB5



Gestion simplifiée des stocks





Disponible sous forme de blocs individuels, de sous-ensembles et de produits complets (plastique et métal)

Offer Marketing Illustration

Product benefits / Features

Caractéristiques techniques

Harmony XB5



Offer Marketing Illustration

Product benefits / Features

Bouton poussoir en plastique

Harmony XB5

Montage et démontage rapides et faciles

Excellente connexion mécanique avec la tête de commande

Différents types de connexions : borniers à vis-étrier, Push-in, connecteur Faston & broches pour circuit imprimé

Robustesse pour résister aux environnements difficiles

Large choix d'accessoires pour personnaliser vos panneaux

Image of product / Alternate images

Alternative

