

OAWH Forced-Air Architectural Wall Heater



Features

Color

- Standard: white, almond, metallic silver, bronze, metallic charcoal, textured black, beige-grey, aluminum, semi-gloss black.
- Custom colors available upon request.

Finish

- Standard: epoxy/polyester powder paint.
- Optional: anodized aluminum.

Voltage

- 120V, 208V, 240/208V, 277V, 347V, 480V, 600V, 1-phase.

Construction

- Extruded aluminum front grille, 1/8 in. (3.2 mm) thick. **1**
- Bottom air outlet.
- High-limit temperature control with automatic reset.

Fan

- Closed, factory-lubricated motor.
- 160 cfm fan (single unit: 55 dBA); 2 X 160 cfm fan (double unit: 58 dBA), 3 X 160 cfm fan (triple unit: 61 dBA). **2**
- Fan delay purges heater of residual heat.

Heating element

- Durable tubular heating element with fins. **3**

Control

- Built-in tamperproof thermostat included. **4**
- 24V relay, with or without transformer available.

Note: Thermostat is not included in heater with factory installed relay. Any remote thermostat or relay must be connected to the heater control terminal block.

Installation


- Minimum clearance from the floor and adjacent walls: 10 in. (25.4 cm).
- Adaptor for surface mounting available.

Warranty

- 1-year warranty against defects.

Application

- Apartment building, commercial building, entrance way, stairwell, garage.

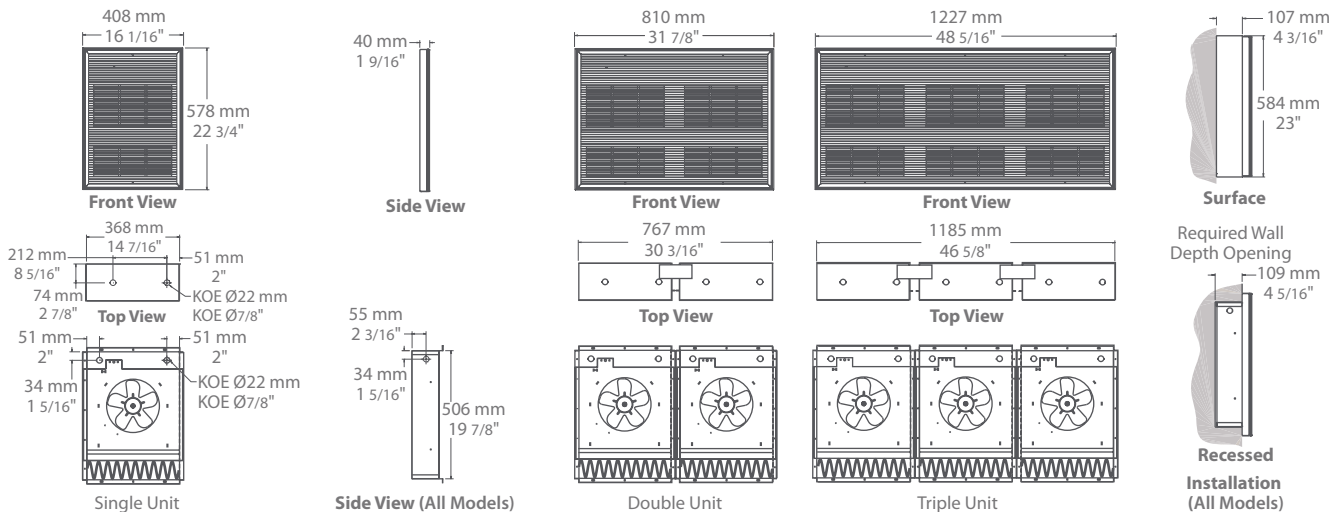

OAWH

Models

Watts	Volts (ph)	Product # ¹	Unit	Weight	
				lb	kg
1500	120 (1)	OAWH01502	single	24.0	10.9
2000	208 (1)	OAWH02008	single	24.0	10.9
4000	208 (1)	OAWH04008	single	24.0	10.9
4800	208 (1)	OAWH04808	single	24.0	10.9
6000	208 (3)	OAWH06038	triple	90.0	40.9
8000	208 (1)	OAWH08008	double	50.0	22.7
9000	208 (3)	OAWH09038	triple	90.0	40.9
12000	208 (1)	OAWH12008	triple	90.0	40.9
12000	208 (3)	OAWH12038	triple	90.0	40.9
1500/1125 ²	240/208 (1)	OAWH01500	single	24.0	10.9
2000/1500 ²	240/208 (1)	OAWH02000	single	24.0	10.9
3000/2250 ²	240/208 (1)	OAWH03000	single	24.0	10.9
4000/3000 ²	240/208 (1)	OAWH04000	single	24.0	10.9
4800/3600 ²	240/208 (1)	OAWH04800	single	24.0	10.9
6000/4500 ²	240/208 (1)	OAWH06000	double	50.0	22.7
8000/6000 ²	240/208 (1)	OAWH08000	double	50.0	22.7
12000/9000 ²	240/208 (1)	OAWH12000	triple	90.0	40.9
1500	347 (1)	OAWH01507	single	24.0	10.9
2000	347 (1)	OAWH02007	single	24.0	10.9
3000	347 (1)	OAWH03007	single	24.0	10.9
4000	347 (1)	OAWH04007	single	24.0	10.9
4800	347 (1)	OAWH04807	single	24.0	10.9
6000	347 (1)	OAWH06007	double	50.0	22.7
8000	347 (1)	OAWH08007	double	50.0	22.7
12000	347 (1)	OAWH12007	triple	90.0	40.9
1500	480 (1)	OAWH01504	single	28.0	12.7
2000	480 (1)	OAWH02004	single	28.0	12.7
3000	480 (1)	OAWH03004	single	28.0	12.7
4000	480 (1)	OAWH04004	single	28.0	12.7
4800	480 (1)	OAWH04804	single	28.0	12.7
6000	480 (1)	OAWH06004	double	50.0	22.7
8000	480 (1)	OAWH08004	double	50.0	22.7
12000	480 (1)	OAWH12004	triple	90.0	40.9
12000	480 (3)	OAWH12034	triple	90.0	40.9
1500	600 (1)	OAWH01506	single	28.0	12.7
2000	600 (1)	OAWH02006	single	28.0	12.7
3000	600 (1)	OAWH03006	single	28.0	12.7
4000	600 (1)	OAWH04006	single	28.0	12.7
4800	600 (1)	OAWH04806	single	28.0	12.7
6000	600 (1)	OAWH06006	double	50.0	22.7
6000	600 (3)	OAWH06036	triple	90.0	40.9
8000	600 (1)	OAWH08006	double	50.0	22.7
9000	600 (3)	OAWH09036	triple	90.0	40.9
12000	600 (1)	OAWH12006	triple	90.0	40.9
12000	600 (3)	OAWH12036	triple	90.0	40.9

Options

Product #	Description	Factory Installed	Kit
OAWH-BSA	Surface mounting box, single unit	-	✓
OAWH-BSA2	Surface mounting box, double unit	-	✓
OAWH-BSA3	Surface mounting box, triple unit	-	✓
OAWH-DIS20	Disconnect switch, double-pole, 20A at 277V and less	✓	✓
OAWH-DIS40	Disconnect switch, triple-pole, 40A at 600V max.	✓	✓
OAWH-DIS80	Disconnect switch, triple-pole, 80A at 600V max.	✓	✓
OAWH-IV	Fan switch	✓	-
OAWH-R	24V control relay, without transformer	✓	-
OAWH-RT	24V control relay, with transformer	✓	-

¹ Built-in thermostat included.

² 208V = 75% of wattage at 240V.

Add "BL" for white, "AM" for almond, "AE" for metallic silver, "BG" for beige-grey, "BZ" for bronze, "CM" for mettalic charcoal, "NR" for textured black, "AL" for aluminum, "NL" for semi-gloss black.

For options available as factory installed and kit, if not mentioned on the order, will automatically be shipped as a kit.

277V available upon request.