


ORDERING INFORMATION

Order code: 61119
 Description: E296T12PRS120/N/HO/AS
 UPC: 69549611191

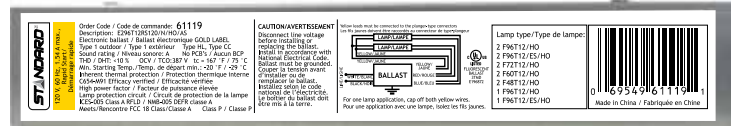

SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Rapid Start	Contains PCBs:	No
Lamp connection:	Series	Sound rating:	A
Input voltage (V):	120	Open current voltage (OCV) (V):	387
Input frequency (Hz):	60	Inherent thermal protection:	Yes
Max. case temperature:	75 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A RFLD
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F96T12HO (110W)	2	110	-20/-29	1.65	195	0.89	10	0.99	1.7	0.46
F96T12HO/ES (95W)	2	95	60/15	1.44	170	0.89	10	0.99	1.7	0.52
F72T12HO (85W)	2	85	-20/-29	1.25	148	0.91	10	0.98	1.7	0.61
F60T12HO (75W)	2	75	-20/-29	1.05	124	1.00	10	0.98	1.7	0.81
F48T12HO (60W)	2	60	-20/-29	0.88	104	1.12	10	0.98	1.7	1.08
F96T12HO (110W)	1	110	-20/-29	0.92	109	0.90	10	0.98	1.7	0.83
F96T12HO/ES (95W)	1	95	60/15	0.80	95	1.05	10	0.98	1.7	1.11

WARRANTY:


Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015


ORDERING INFORMATION

Order code: 61119
 Description: E296T12PRS120/N/HO/AS
 UPC: 69549611191

WIRING DIAGRAM

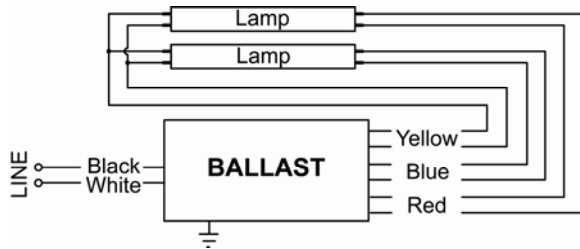

Yellow leads must be connected to the plunger-type connectors

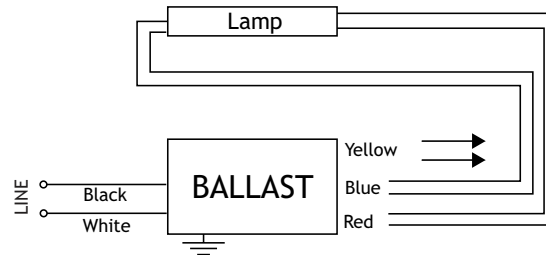


Red leads must be connected to the plunger-type connector

LEADS LENGTH

Black	22" (56 cm)
White	22" (56 cm)
Blue	46" (117 cm)
Red	46" (117 cm)
Yellow	70" (178 cm)

BALLAST DIMENSIONS

Length (L):	11.75" (29.85 cm)
Width (W):	2.30" (5.84 cm)
Height (H):	1.60" (4.06 cm)
Mounting (M):	11.00" (27.94 cm)

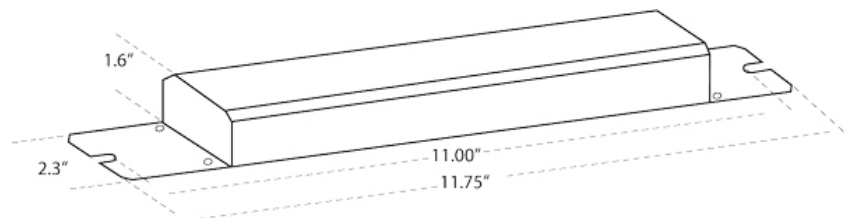

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015