

# Keywerks™ Standard Furniture Faceplates

## Description

Keywerks™ standard furniture faceplates are designed to fit in modular furniture with standard outlet openings as defined in TIA-569-B. They enable a more functional and flexible work station in an open office environment by consolidating audio/video and data into a single connection area integrated in the modular furniture. These characteristics also allow for rapid and easy moves, adds, and changes (MAC). They can receive all Keywerks modular connectors and multimedia inserts as well as any other products with a standard Keystone footprint. They are offered in 3-Port and 4-Port capacity in white, almond, and black.

## Features and Benefits

Compact design for a smooth appearance  
 Flush mount port  
 Fits all the modular furniture with standard outlet opening (TIA-569-B)

Compatible with all products with a standard Keystone footprint  
 Self-adhesive ID labels for easy port identification


## Applications

Work area

## Certification and Compliance

TIA-569-B	Commercial Building Standard for Telecommunications Pathways and Spaces.
NEMA OS1	Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports.
FCC part 68	Connection to the Terminal Equipment to the Public Switched Telephone Network.
UL	Safety Bi-national Standard Listed.
UL 94	Tests for Flammability of Plastic Material for Parts in Devices and Appliances.
RoHS	Directive on Restriction of Hazardous Substances.



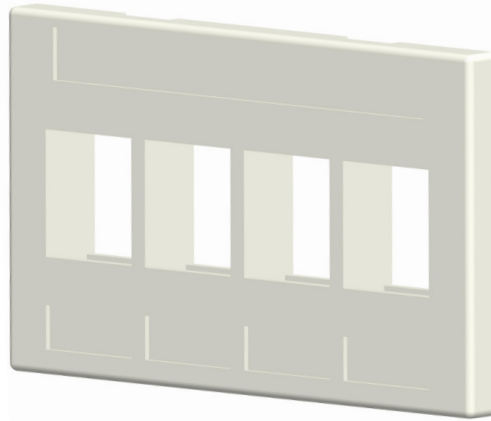

### Ordering Information

Description	Part Number
3-Port, white	WW000903-WH
3-Port, almond	WW000903-AL
3-Port, black	WW000903-BK
4-Port, white	WW000904-WH
4-Port, almond	WW000904-AL
4-Port, black	WW000904-BK

### Packaging

Description
Clear poly bag, 1 unit per bag.

### Inclusion

Description
Instruction manual, 1 Keywerks™ blank insert with the 3-Port furniture faceplate, 2 Keywerks blank insert with the 4-Port furniture faceplate, identification label.

### Physical Characteristics

Parameter	Value
Housing material	High impact UL 94V-0 ABS thermoplastic
Overall dimensions	3-Port and 4-Port capacity: 79.6 mm (3.1 in) x 46.8 mm (1.8 in) x 10.9 mm (0.43 in)

### Mechanical Characteristics

Parameter	Value
Installation temperature	-10° C (14° F) ~ 40° C (104° F)
Storage temperature	-40° C (-40 F) ~ 125° C (257° F)