

PRO MAX 480W 24V 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Similar to illustration

PROmax offers diverse solutions for demanding automation.

Our high performance and durable PROmax switch-mode power supply units are designed for especially demanding requirements. PROmax reliably copes with continuous overload of up to 20% or short-term peak loads of 300% occurring with high control cabinet temperatures.

High boost capability and full power are also made possible in a wide temperature range. Our switch-mode power supply units can be used around the world and are also suitable for confined spaces thanks to their low width.

Together with our uninterruptible DC USPs, the diode modules or CAP modules, you can create a power supply solution that is tailored to your requirements.



General ordering data

| | |
|------------|---|
| Version | Power supply, switch-mode power supply unit, 24 V |
| Order No. | 1478140000 |
| Type | PRO MAX 480W 24V 20A |
| GTIN (EAN) | 4050118286137 |
| Qty. | 1 pc(s). |

PRO MAX 480W 24V 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 150 mm | Depth (inches) | 5.905 inch |
| Height | 130 mm | Height (inches) | 5.118 inch |
| Width | 90 mm | Width (inches) | 3.543 inch |
| Net weight | 2,000 g | | |

Temperatures

| | | | |
|-----------------------------------|---------------------------|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C | Operating temperature | -25 °C...70 °C |
| Humidity at operating temperature | 5...95 %, no condensation | Start-up | ≥ -40 °C |

Rated data UL

| | |
|-------------------------|---------|
| Certificate No. (cURus) | E255651 |
|-------------------------|---------|

Input

| | | | |
|--|--|-------|--|
| AC input voltage range | 85...277 V AC | | |
| Connection system | Screw connection | | |
| Current consumption in relation to the input voltage | Voltage type | AC | |
| | Input voltage | 230 V | |
| | Input current | 2.3 A | |
| | Voltage type | DC | |
| | Input voltage | 120 V | |
| | Input current | 4.8 A | |
| DC input voltage range | 80...370 V DC | | |
| Frequency range AC | 45...65 Hz | | |
| Input fuse (internal) | Yes | | |
| Inrush current | max. 15 A | | |
| Nominal power consumption | 521.7 VA | | |
| Rated input voltage | 100...240 V AC | | |
| Recommended back-up fuse | 16 A, char. B circuit breaker, 10 A, Char. C circuit breaker | | |
| Surge protection | Varistor | | |

Output

| | | | |
|--------------------------------------|---|---|--------------------------|
| Connection system | Screw connection | Continuous output current @ $U_{Nominal}$ | 24 A @ 45°C, 15 A @ 70°C |
| Nominal output current for U_{nom} | 20 A @ 60 °C | Output power | 480 W |
| Output voltage, max. | 29.5 V | Output voltage, min. | 22.5 V |
| Output voltage, note | (adjustable via potentiometer) | Parallel connection option | yes, max. 3 |
| Protection against inverse voltage | Yes | Rated output voltage | 24 V DC ± 1 % |
| Residual ripple, breaking spikes | <50 mV _{ss} @ U_{Nenn} , Full Load | | |

General data

| | |
|--|---|
| AC failure bridging time @ I_{nom} | min. 20 ms |
| Current limiting | > 120% I_N |
| Degree of efficiency | 92 % |
| Derating | > 60°C / 75% @ 70°C |
| Earth leakage current, max. | 3.5 mA |
| Housing version | Metal, corrosion resistant |
| Mounting position, installation notice | Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between. |

Creation date November 26, 2024 11:43:02 AM CET

PRO MAX 480W 24V 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

| | | |
|---|--|-------|
| Power factor | Power factor typical | 0.95 |
| | Input voltage | 230 V |
| | Ambient temperature | 25 °C |
| | Output power | 480 W |
| Power loss, idling | 4.8 W | |
| Power loss, nominal load | 41.7 W | |
| Protection against reverse voltages from the load | 30...35 V DC | |
| Protection degree | IP20 | |
| Short-circuit protection | Yes | |
| Status indication | LED red/green and relay (≥ 21.6 V DC LED green, relay on/ ≤ 20.6 V DC LED red, relay off) | |
| Surge voltage category | III | |

EMC / shock / vibration

| | | | |
|------------------------------------|--|---|---------|
| Interference immunity test acc. to | EN 55024, EN 55032, IEC61000-3-2,-3, IEC61000-4-2,-3,-4,-5,-6,-8,-11 | Noise emission in accordance with EN55032 | Class B |
| Shock resistance IEC 60068-2-27 | 30 g in all directions | Vibration resistance IEC 60068-2-6 | 2.3 g |

Insulation coordination

| | | | |
|----------------------------------|-----------------------|-----------------------------------|--------|
| Insulation voltage input / earth | 3.5 kV | Insulation voltage output / earth | 0.5 kV |
| Insulation voltage, input/output | 4 kV | Pollution severity | 2 |
| Protection class | I, with PE connection | Surge voltage category | III |

Electrical safety (applied standards)

| | | | |
|---|--|---|------------------------------------|
| Electrical machine equipment | Acc. to EN60204 | For use with electronic equipment | Acc. to EN50178 / VDE0160 |
| Protection against dangerous shock currents | Acc. to VDE0106-101 | Protective separation / protection against electrical shock | VDE0100-410 / acc. to DIN57100-410 |
| Safety extra-low voltage | SELV acc. to IEC 60950-1, PELV according to EN 60204-1 | Safety transformers for switch-mode power supplies | According to EN 61558-2-16 |

Connection data (input)

| | | | |
|---|----------------------|---|-------------------|
| Conductor cross-section, AWG/kcmil , max. | 10 AWG | Conductor cross-section, AWG/kcmil , min. | 26 AWG |
| Conductor cross-section, flexible , min. | 0.22 mm ² | Conductor cross-section, rigid , max. | 6 mm ² |
| Conductor cross-section, rigid , min. | 0.18 mm ² | Connection system | Screw connection |
| Number of terminals | 3 for L/N/PE | Screwdriver blade | 0.8 x 4.0, PZ 1 |
| Tightening torque, max. | 0.6 Nm | Tightening torque, min. | 0.5 Nm |
| Wire connection cross section, flexible (input), max. | 4 mm ² | | |

Connection data (output)

| | | | |
|---|-------------------|---|----------------------|
| Conductor cross-section, AWG/kcmil , max. | 10 AWG | Conductor cross-section, AWG/kcmil , min. | 26 AWG |
| Conductor cross-section, flexible , max. | 4 mm ² | Conductor cross-section, flexible , min. | 0.22 mm ² |
| Conductor cross-section, rigid , max. | 6 mm ² | Conductor cross-section, rigid , min. | 0.18 mm ² |
| Connection system | Screw connection | Number of terminals | 8 (+,+,-,11,13,14) |
| Screwdriver blade | 0.8 x 4.0, PZ 1 | Tightening torque, max. | 0.6 Nm |
| Tightening torque, min. | 0.5 Nm | | |

Creation date November 26, 2024 11:43:02 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

PRO MAX 480W 24V 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Signalling

| | | | |
|---------------------------|--|------------------|-----|
| Contact load (NO contact) | max. 30 V DC / 1 A | Floating contact | Yes |
| Status indication | LED red/green and relay (≥21.6 V DC LED green, relay on/ ≤20.6 LED red, relay off) | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002540 | ETIM 7.0 | EC002540 |
| ETIM 8.0 | EC002540 | ETIM 9.0 | EC002540 |
| ECLASS 9.0 | 27-04-07-01 | ECLASS 9.1 | 27-04-07-01 |
| ECLASS 10.0 | 27-04-07-01 | ECLASS 11.0 | 27-04-07-01 |
| ECLASS 12.0 | 27-04-07-01 | ECLASS 13.0 | 27-04-07-01 |
| ECLASS 14.0 | 27-04-07-01 | | |

Environmental Product Compliance

| | |
|--------------------------------------|--------------------------------------|
| RoHS Compliance Status | Compliant with exemption |
| RoHS Exemption (if applicable/known) | 7a, 7cl |
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 6d8cdf22-8230-4af8-86c8-3558c716666d |

Approvals

Approvals



| | |
|---------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURus) | E255651 |
| Certificate no. (cULus) | E258476 |
| Certificate no. (cULusEX) | E470829 |

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | UL 508 Certificate UL 60950-1 Certificate.pdf UL CL1 DIV2 Certificate.pdf DNV Certificate.pdf DoP EN54.4 Declaration of Conformity UK Conformity Assessed |
| Engineering Data | CAD data – STEP |
| User Documentation | Operating instructions |
| Catalogues | Catalogues in PDF-format |

Creation date November 26, 2024 11:43:02 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

Data sheet


PRO MAX 480W 24V 20A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings

Electric symbol

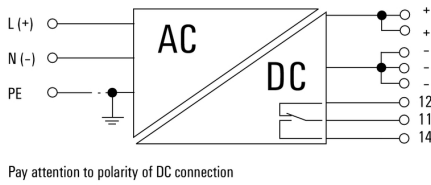

Derating curve

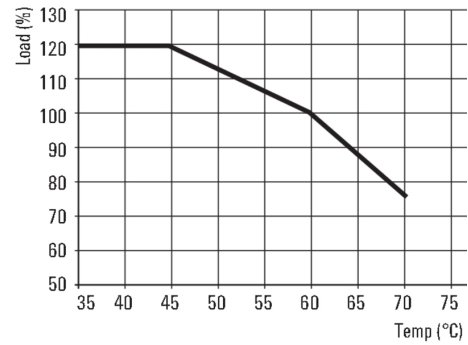

Derating curve

