

# STC Series



## 200 AMP - 7 JAW Polyphase 3PH - 4 Wire Meter Sockets



CATALOGUE #	DESCRIPTION	ENCLOSURE SIZE H X W X D	WEIGHT
<b>STC700PK</b>	Overhead hub opening	21 <sup>1</sup> / <sub>2</sub> " x 10 <sup>1</sup> / <sub>8</sub> " x 5 <sup>3</sup> / <sub>8</sub> "	21 lbs.
<b>STC703PK</b>	Overhead hub opening c/w insulated neutral	21 <sup>1</sup> / <sub>2</sub> " x 10 <sup>1</sup> / <sub>8</sub> " x 5 <sup>3</sup> / <sub>8</sub> "	21 lbs.
<b>STC700RK</b>	Combination underground/overhead	21 <sup>1</sup> / <sub>2</sub> " x 12" x 5 <sup>3</sup> / <sub>8</sub> "	22 lbs.
<b>STC703RK</b>	Combination underground/overhead c/w insulated neutral	21 <sup>1</sup> / <sub>2</sub> " x 12" x 5 <sup>3</sup> / <sub>8</sub> "	22 lbs.

- 200 Amp, 600 VOLT
- CSA enclosure 3
- CSA approved for copper or aluminum
- Conductor range #6 -250 MCM CU/AL
- Comes c/w HUB closure adapter plate HD2025

- For overhead installations order "HD" hubs separately
- Field adapted insulated neutral "INK200"



KNOCKOUT CODE	CONDUIT SIZE
<b>AA</b>	1/2"
<b>K</b>	2", 2 <sup>1</sup> / <sub>2</sub> ", 3"

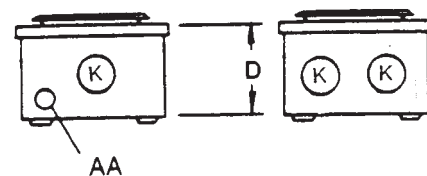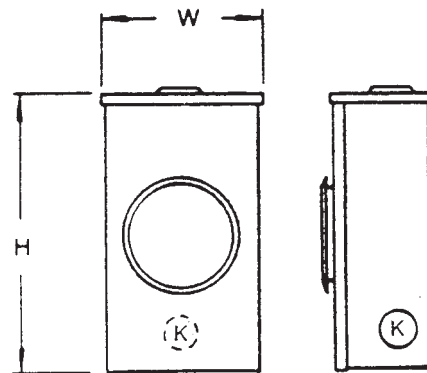

For permanent by-pass  
use JC6B jumper cover