

# Extrusion & Lense

STANDARD extrusions are designed to be paired with LED tapes of a width of up to 14 mm. Made of high quality aluminum, they provide a sleek and sophisticated appearance for both residential and commercial applications. Adding a lens to the extrusion will complete the look of the luminaire; four different lens finishes are available.



## Extrusion

Order code	Description	Order code for custom length	Series	Type	Length		Width		Height		Maximum LED tape width (mm)	Case qty (master)
					(ft.)	(m)	(in.)	(mm)	(in.)	(mm)		
65865 <sup>2</sup>	EXTRUSION/100/8'/ALUM/STD	66341 <sup>1</sup>	100	Sleek	8	2.4	3/4	19	1/4	6	14	10
65866	EXTRUSION/200/8'/ALUM/STD	66342 <sup>1</sup>	200	Deep	8	2.4	3/4	19	7/16	12	14	10
65867	EXTRUSION/210/RECESSED/8'/ALUM/STD	66343 <sup>1</sup>	210	Recessed	8	2.4	1 1/32	26	7/16	12	14	10
65869	EXTRUSION/300/ROUNDED/8'/ALUM/STD	66345 <sup>1</sup>	300	Rounded	8	2.4	3/4	19	7/16	12	14	5
65868	EXTRUSION/400/8'/ALUM/STD	66344 <sup>1</sup>	400	Versatile	8	2.4	3/4	19	21/32	17	14	10
65870	EXTRUSION/500/CORNER/8'/ALUM/STD	66346 <sup>1</sup>	500	Corner	8	2.4	3/4	19	7/16	12	14	10
66678	EXTRUSION/600/HEATSINK/8'/ALUM/STD	66679 <sup>1</sup>	600	Heatsink	8	2.4	1/2	13	3/32	2	10	20

## Lens

### Clear

- 96.5% of light output
- 50 to 80 Kelvin increase

### Frost


- 85% of light output
- 120 to 140 Kelvin reduction

### Opal

- 65% of light output
- 190 to 240 Kelvin reduction
- Dot free with a minimum of 37 LED chips per foot (120 LED chips per meter)

### Diffused

- 95% of light output
- 50 to 80 Kelvin reduction

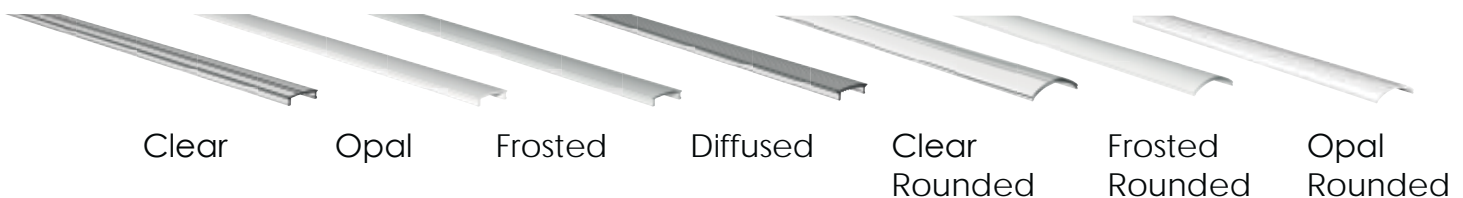

Order code	Description	Order code for custom length	Finish	Length		Width		Compatible with series	Case qty (master)
				(ft.)	(m)	(in.)	(mm)		
65871	LENS/8'/CLEAR/STD	66347 <sup>1</sup>	Clear	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65872	LENS/8'/OPAL/STD	66348 <sup>1</sup>	Opal	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65873	LENS/8'/FROSTED/STD	66349 <sup>1</sup>	Frosted	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65874	LENS/8'/DIFFUSED/STD	66350 <sup>1</sup>	Diffused	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65875	LENS/8'/ROUNDED/CLEAR/STD	66351 <sup>1</sup>	Clear	8	2.4	31/32	25	500	20
65876	LENS/8'/ROUNDED/FROSTED/STD	66352 <sup>1</sup>	Frosted	8	2.4	31/32	25	500	20
65877	LENS/8'/ROUNDED/OPAL/STD	66353 <sup>1</sup>	Opal	8	2.4	31/32	25	500	20

<sup>1</sup> Available in custom lengths with the alternative order code  
<sup>2</sup> The series 100 (sleek) can't be used with the tape to tape or tape to wire connectors