



## Main

Range compatibility	Lexium 28
Product or component type	Servo motor
Device short name	BCH2

## Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V
Phase	Three phase
Continuous stall current	8.75 A
Continuous stall torque	84.52 Lbf.in (9.55 N.m) LXM28... 12 A, 220 V, three phase 84.52 lbf.in (9.55 N.m)
Continuous power	2000 W
Peak stall torque	253.57 Lbf.in (28.65 N.m) LXM28... 12 A, 220 V, three phase 253.57 lbf.in (28.65 N.m)
Nominal output power	2000 W LXM28... 12 A, 220 V, three phase 2000 W
Nominal torque	84.52 Lbf.in (9.55 N.m) LXM28... 12 A, 220 V, three phase 84.52 lbf.in (9.55 N.m)
Nominal speed	2000 rpm 2000 rpm LXM28... 12 A, 220 V, three phase
Maximum current Irms	35.4 A 2 kW, 220 V
Maximum permanent current	9.6 A
Product compatibility	LXM28... servo drive 2 kW, 220 V, three phase
Shaft end	Smooth shaft
Shaft diameter	1.38 in (35 mm)
Shaft length	3.11 in (79 mm)
Feedback type	20 bits single turn absolute encoder
Holding brake	With
Holding torque	424.84 lbf.in (48 N.m) built-in
Mounting support	Asian standard flange
Motor flange size	7.09 in (180 mm)
Electrical connection	Connector MIL
Torque constant	1.09 N.m/A 68 °F (20 °C)
Back emf constant	66 V/krpm 68 °F (20 °C)
Rotor inertia	27 kg.cm <sup>2</sup>
Stator resistance	0.572 Ohm 68 °F (20 °C)
Stator inductance	8.86 mH 68 °F (20 °C)
Stator electrical time constant	15.49 ms 68 °F (20 °C)
Maximum radial force Fr	1200 N 2000 rpm
Maximum axial force Fa	497 N
Brake pull-in power	49.6 W

Type of cooling	Natural convection
Length	7.99 in (203 mm)
Number of motor stacks	1
Centring collar diameter	4.50 in (114.3 mm)
Centring collar depth	0.16 in (4 mm)
Number of mounting holes	4
Mounting holes diameter	0.53 in (13.5 mm)
Circle diameter of the mounting holes	7.87 in (200 mm)
Distance shaft shoulder-flange	0.16 in (4 mm)
Net Weight	39.68 lb(US) (18 kg)

## Environment

IP degree of protection	IP54 IM B5, IM V1 IP50 IM V3
Ambient air temperature for operation	32...104 °F (0...40 °C)

## Ordering and shipping details

Category	18281 - LEXIUM 23/28 MOTORS
Discount Schedule	PC53
GTIN	03606480734694
Nbr. of units in pkg.	1
Package weight(Lbs)	42.7 lb(US) (19.37 kg)
Returnability	No
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	9.65 in (24.5 cm)
Package 1 width	11.42 in (29 cm)
Package 1 Length	23.03 in (58.5 cm)

Dimensions

Dimensions of Motor




	mm	in.
L (without holding brake)	169	6.65
L (with holding brake)	203	7.99
A	79	3.11
C	73	2.87
D	35	1.38
F	63	2.48
N	28	1.10
M	M12	
R	30	1.18
V	10	0.39
W	10	0.39
Z	103	4.06

---

Torque/Speed Curves with 230 V Three Phase Supply Voltage

---

Servo Motor with LXM28AU20●●● Servo Drive

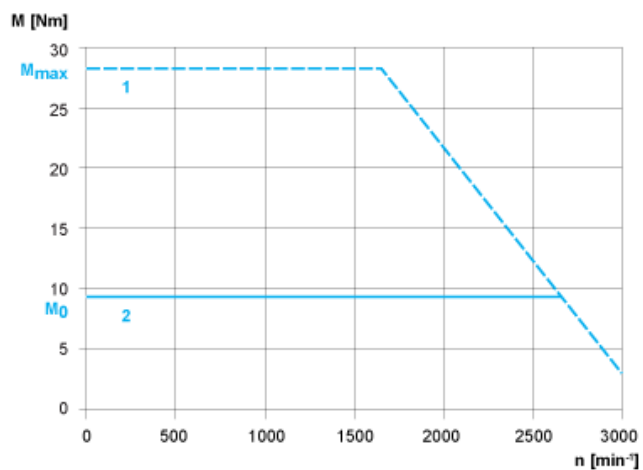

- 1 : Peak torque
- 2 : Continuous torque