


Product Datasheet

Characteristic

XZCPV1141L2

pre-wired connectors XZ - straight
female - M12 - 4 pins - cable PVC 2m

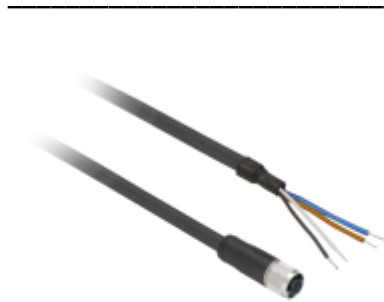

Main

| | |
|------------------------------------|----------------------|
| accessory / separate part category | Cabling accessory |
| accessory / separate part type | Pre-wired connectors |
| series name | General purpose |

Complementary

| | |
|--------------------------------|---------------------------------------|
| electrical connection | Straight female connector M12, 4 pins |
| cable connector fixing | Screw-on |
| collar material | Metal |
| status LED | Without |
| cable length | 6.56 ft (2 m) |
| cable outer diameter | 0.18 in (4.6 mm) |
| cable composition | 4 x 0.25 mm ² |
| wire insulation material | PVC |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| Line Rated Current | 3 A |
| contact resistance | 5000 µOhm |
| minimum insulating resistance | 1 GΩ |
| net weight | 0.20 lb(US) (0.09 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP65 IP67 |
| product certifications | CULus |
| ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Offer Sustainability

| | |
|----------------------------|--|
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| RoHS exemption information | Yes |