



## Main

Product Type	Circuit breaker
Range	PowerPact M
Breaking Capacity Code	G
Trip Unit Technology	Electronic, basic, ET 1.0, LI

## Complementary

Current Sensor Rating Range	350 A
Rated Current	350 A
Rated Operational Voltage	600 V AC
Mounting Mode	Unit mount
Poles Description	3P
Breaking Capacity	65 kA 240 V AC 35 kA at 480 V AC 18 kA 600 V AC
Continuous Current Rating	80 %
Electrical Connection	Busbar connection line Busbar connection load
Terminal Identifier	AL800M23K
Magnetic Tripping Current	700...3500 A
Circuit Breaker Type	M-frame
Height	12.86 in (326.6 mm)
Width	0.32 in (8.06 mm)
Depth	8.27 in (210 mm)
Tightening Torque	442.54 lbf.in (50 N.m) 0.15...0.37 in <sup>2</sup> (95...240 mm <sup>2</sup> ) AWG 3/0...500 kcmil)

## Environment

Certifications	CSA
----------------	-----

IEC  
UL listed

---

## Packing Units

---

Package 1 Weight	29.00 lb(US) (13.154 kg)
------------------	--------------------------

---


## Offer Sustainability

---

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
PVC free	Yes

---

Approximate Dimensions

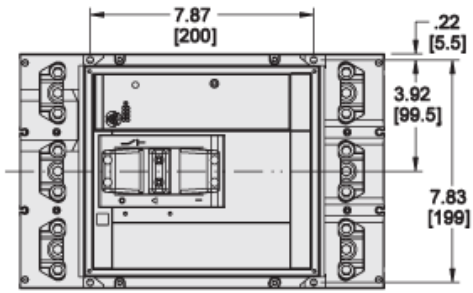

in.  
[mm]

