



## Trim Fitting Plates

STANDARD's trim feature fitting plates with slanted corners that allow for very smooth and secure fitting.

## Screw-in Mounting Systems

Self-positioning screw in mounting system allows for secure installation. The screws do not come out through the back the fixture can therefore fit in more restricted areas. This system conveniently permits the installation in ceilings up to 1 ¼" (32 mm) in thickness and "double drywall" application.

Housing screw-in system, screws do not come out through the back.

## Leveling System

The can on the new construction type housings can quickly be adjusted to ceiling thickness using the angled screw leveling system (Up to 2").

## Residential electric cable clamps

New Construction and Remodeler housings have "Loomex" compatible knock-outs on their junction box. The clamp behind the knock-outs secures the residential cable safely in place which means there is no need for a grommet and wiring is done faster.


## Mounting Clips System\*

The 3" and 4 ¼" remodelers are equipped with a patented self-adjustable mounting clips system which allows for a swift, simple and steady installation.

## Wire to wire Connectors

STANDARD's housing all come equipped with wire to wire connectors which allow for easy and rapid connection of the fixture to the main power supply.

Order code	Description	Opening diameter (in.)	Case qty
<b>Mounting Plates</b>			
62674	RF/ACC/3/MOUNT. PLATE/SQR/STD	3 ¼	50
62675	RF/ACC/3/MOUNT. PLATE/ADJ/STD	3 ¼	50
62676	RF/ACC/4/MOUNT. PLATE/SQR/STD	4 ¼	50
62677	RF/ACC/4/MOUNT. PLATE/ADJ/STD	4 ¼	100
64337	RF/ACC/3.5/MOUNT. PLATE/SQR/STD	3 ½	50
64338	RF/ACC/4.5/MOUNT. PLATE/SQR/STD	4 ½	50
<b>Mounting Plates with Hanger Bars</b>			
62673	RF/ACC/3/MOUNT. PLATE/HANG.BARS/STD	3 ¼	25
62678	RF/ACC/4/MOUNT. PLATE/HANG.BARS/STD	4 ¼	25
62771	RF/ACC/3.5/MOUNT. PLATE/HANG.BARS/STD	3 ⅞	25
62772	RF/ACC/4.5/MOUNT. PLATE/HANG.BARS/STD	4 ⅞	25
<b>Vapor Barrier</b>			
62679	RF/ACC/VAPOR BARRIER/STD	N/A	25
<b>Insulated Box</b>			
62672	RF/ACC/INSULATED BOX/3_4.5/STD	3 to 4 ½	4

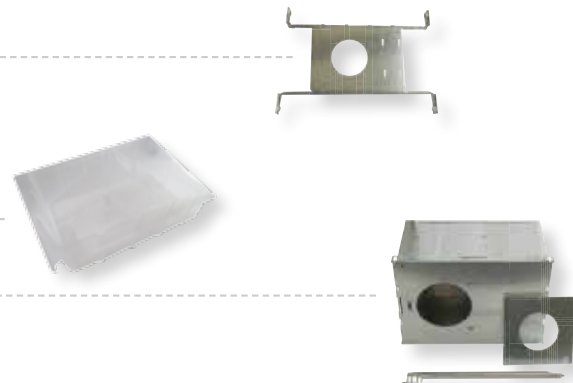

\* Available for 62687 and 62689 only  
For technical information bulletins and installation instructions please visit [www.standardpro.com](http://www.standardpro.com)

# Special Features & Accessories