



Bolts

MACHINE BOLTS

Square Head Machine Bolts complete with Nuts

Bolts 6" and longer made with buffer points. C.S.A. Standard Drawing No. B-3.

Minimum breaking strength at thread root:

3/8" diameter – 4,650 lbs.


1/2" diameter – 8,500 lbs.

5/8" diameter – 13,500 lbs.

3/4" diameter – 20,000 lbs.

Cat. No.	L	T	Std.Pkg.	Wt.-lbs./ C
3/8" Diameter Bolts complete with Hexagon Nuts:				
1538M	1.1/2	1	100	10
238M	2	1	100	11
2538M	2.1/2	1	100	12
338M	3	1	100	13
438M	4	1	50	15
538M	5	1	50	19
638M	6	1	50	22
1/2" Diameter Bolts complete with Square Nuts:				
1512M	1 1/2	1 1/4	50	18
212M	2	1 1/4	50	21
312M	3	1 1/4	50	28
412M	4	1 1/4	25	35
512M	5	1 1/4	25	40
612M	6	1 1/4	25	45
712M	7	1 1/4	25	50
812M	8	4	50	56
1012M	10	4	50	67
1212M	12	6	50	76
1412M	14	6	50	85
1612M	16	6	50	94

Other sizes available upon request.

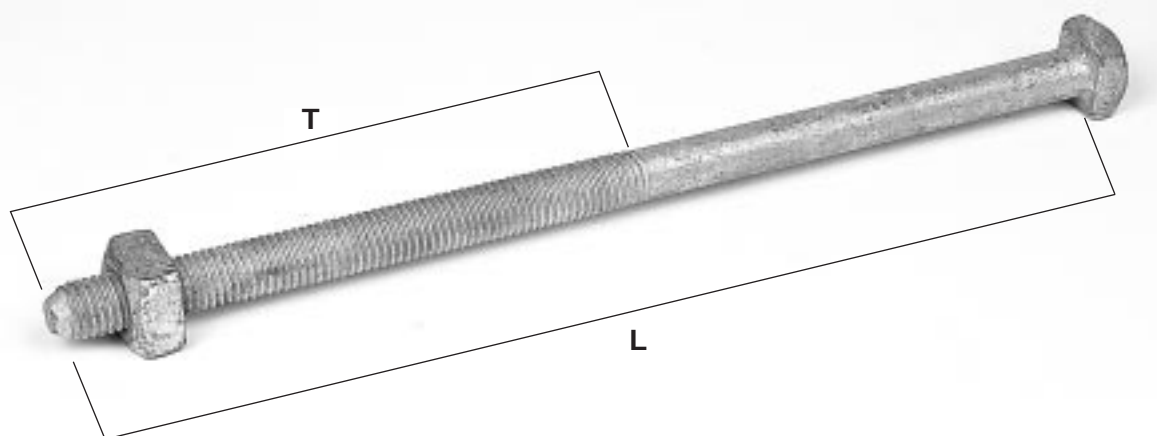

1258M



Square Head Machine Bolts complete with Square Nuts *Cont'd*

Cat.No.	L	T	Std. Pkg.	Wt.-lbs./ C
5/8" Diameter Bolts:				
258M	2	1 1/2	25	38
358M	3	1 1/2	25	45
458M	4	1 1/2	25	54
558M	5	1 1/2	25	62
658M	6	1 1/2	50	70
858M	8	4	50	86
1058M	10	4	50	102
1058M-8	10	8	50	102
1258M	12	6	50	115
1458M	14	6	50	130
1658M	16	6	50	145
1858M	18	6	25	160
2058M	20	6	25	175
2258M	22	6	25	190
2458M	24	6	25	208
2658M	26	6	25	226
2858M	28	6	25	235
3/4" Diameter Bolts:				
634M	6	1 3/4	50	102
834M	8	4	50	130
1034M	10	4	50	150
1234M	12	6	50	175
1434M	14	6	25	200
1634M	16	6	25	225
1834M	18	6	25	245
2034M	20	6	25	270
2234M	22	6	25	300
2434M	24	6	25	320
2634M	26	6	25	340

Other sizes available upon request.

