


LCL

Class L 600Vac, 300 to 6000A

Time-Delay Fuses



Dimensions (inches)

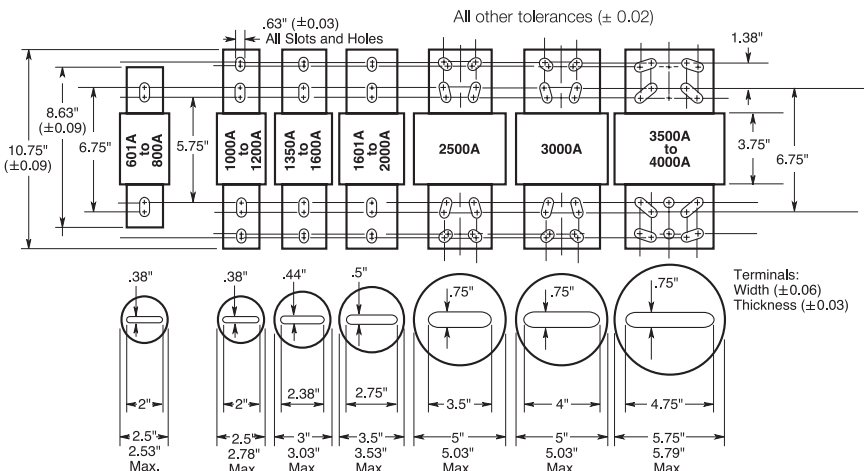

Catalog Symbol: LCL

Time-Delay – 5 seconds (minimum) at 500% rated current

Current-Limiting

Volts: 600Vac (or less)

Amps: 300 to 6000A

IR: 200kA RMS Sym.

Mounting: Bolt Mount

Agency Information: CE, UL Listed, Std. 248-10, Class L, Guide JDDZ, File E162363, CSA Certified, HRC-L C22.2 No. 248.10, Class 1422-02, File 53787

Features

- LCL general purpose copper link fuses.
- Copper links result in a minimum 5 second time-delay at 500% Amp rating.
- Current-limiting – provides component short-circuit protection.
- 200kAIR complies with NEC® Sections 110-9 in today's large capacity systems.
- Selective coordination (blackout prevention) when sized per published coordination ratios.
- No fuse reducers required.

Catalog Numbers (amps)

LCL300*	LCL750	LCL1350	LCL2500
LCL400*	LCL800	LCL1400	LCL3000
LCL500*	LCL801	LCL1500	LCL3500
LCL601	LCL900	LCL1600	LCL4000
LCL650	LCL1000	LCL1800	LCL5000
LCL700	LCL1200	LCL2000	LCL6000

* Not UL Listed.

Carton Quantity and Weight

Amps	Carton Quantity	Weight per Carton	
		lbs	kg
601-800	1	3.75	1.70
1000-1200	1	4.25	1.93
1500-1600	1	6.00	2.72
1800-4000	1	8.50	3.86

Class L Fuse Blocks (600V) Catalog Data


Amps	Poles	Catalog Numbers
601-1200	1	51215
	3	51235

LCL


Class L 600Vac, 300 to 6000A

Time-Delay Fuses

Current Limitation Curves

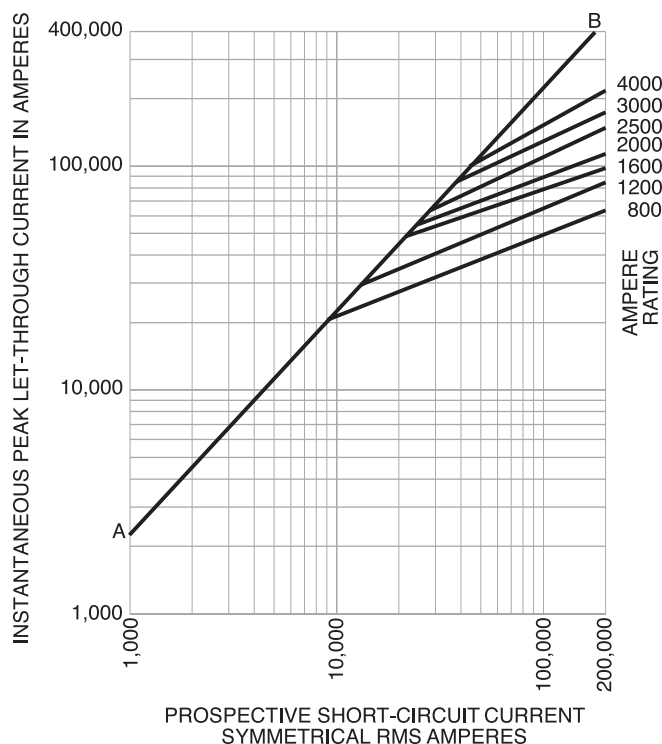

Time-Current Characteristic Curves- Average Melt

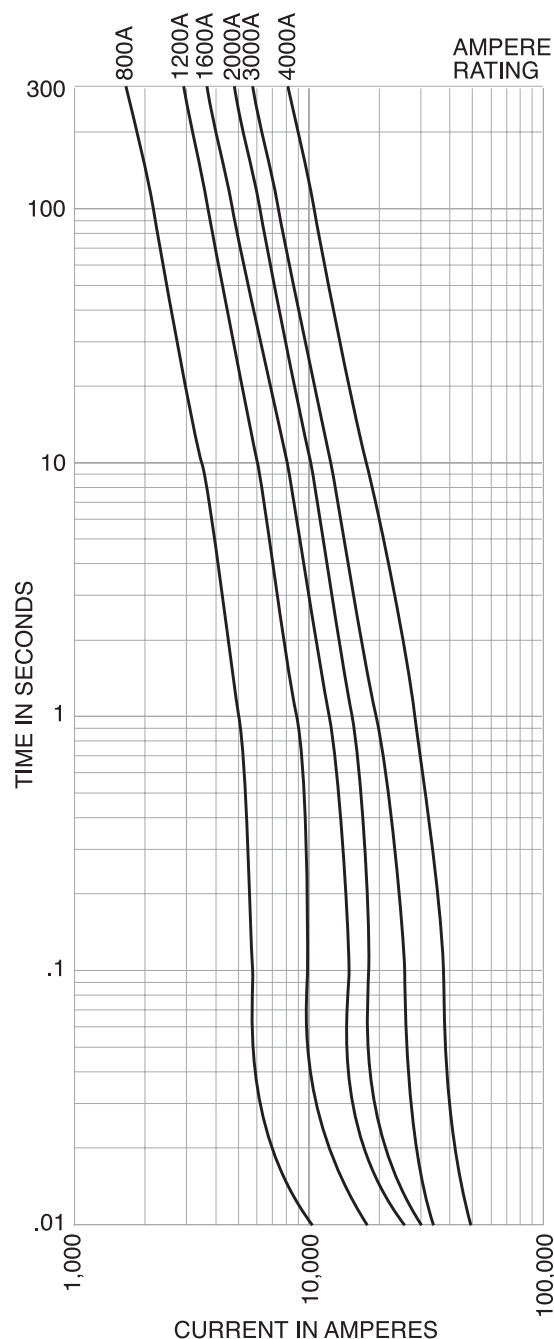

The only controlled copy of this document is the electronic read-only version maintained by Cooper Bussmann. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.