

Cube Mini RL-CUBE-22-BK

Recessed Light



Product Finishes: ■



Specifications:

Voltage: 12V AC

Wattage: 0.2

Volt Amps: 0.3

Lumens: 3

Color Temp: 2700k

IP Rating: 67

CRI: 93

Light Source: Integrated

Material: Polycarbonate

Cable Length: 36"

Lux (lx): 1.4

Candelas (cd): 5.4

Rated Life: 50,000 hours

Warranty: 7-year comprehensive

Dimmable: No



Color-Changing: No

Product Uses:

Decks, Pathways, Pavers,
Stairs, Risers, Concrete

Accessories:

Fang Mini

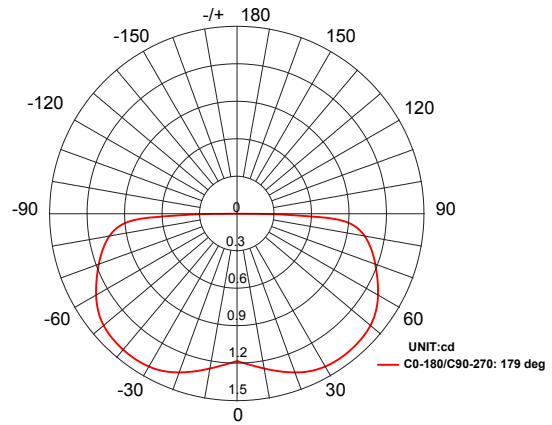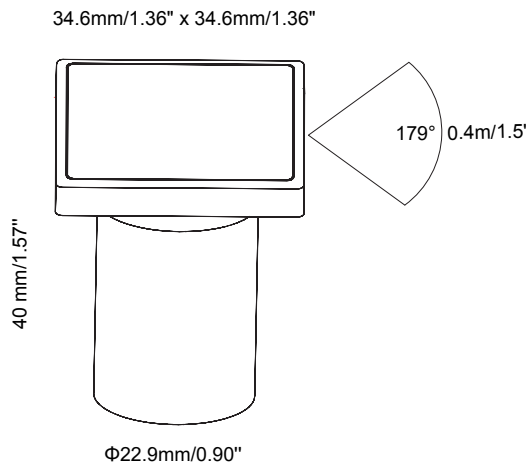

Max. Luminous intensity : 1.46 cd

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.193/14.16		0.84
1.5	0.23/1.69		1.58
3	0.012/0.86		2.21
5	0.006/0.47		3.50
6.5	0.002/0.11		6.83

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG

AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG

