

# Product data sheet

## Characteristics

# 2601BG1

Switch, reversing drum, 5 HP at 575 VAC single phase, 7.5 HP at 575 VAC polyphase, handle operated, NEMA 1 enclosure



### Main

Product	Reversing Drum Switch
Enclosure Rating	NEMA 1
Horsepower	1.5 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase 5 Hp 460 V AC, 1 phase 5 Hp 575 V AC, 1 phase 5 Hp 200 V AC, 3 phase 5 Hp 230 V AC, 3 phase 7.5 Hp 460 V AC, 3 phase 7.5 Hp 575 V AC, 3 phase 2 Hp 115 V DC 2 hp 230 V DC
Maximum Rated Voltage	600 V AC 250 V DC
Number of Poles	3P

### Complementary

Certifications	UL Listed[RETURN]CSA
Electrical Connection	Screw-clamp terminals
Type	B
Width	2.68 in (68.07 mm)
Height	5.38 in (136.65 mm)
Depth	4.61 in (117.09 mm)
Product weight	1.34 lb(US) (0.61 kg)

### Ordering and shipping details

Category	21116-2601
Discount Schedule	CP1
GTIN	785901555438
Returnability	Yes
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.69 in (11.9 cm)
Package 1 Width	5.59 in (14.2 cm)
Package 1 Length	7.09 in (18.0 cm)
Package 1 Weight	2.25 lb(US) (1.02 kg)

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS Declaration</a>


## Contractual warranty

---

Warranty	18 months
----------	-----------

---

Approximate Dimensions

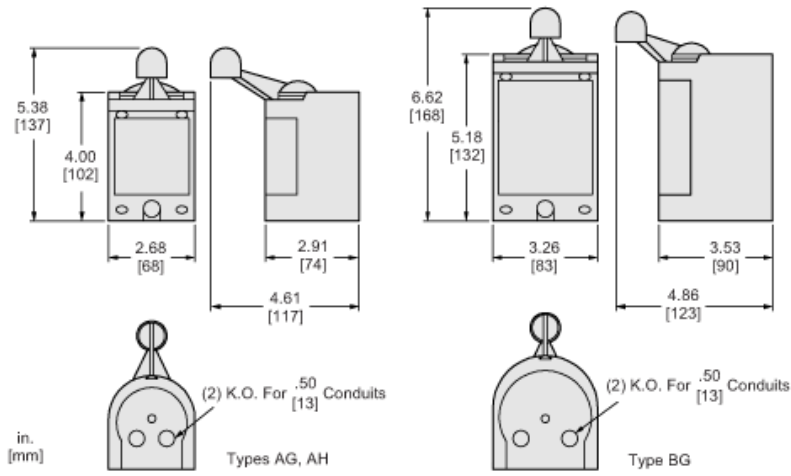


---

Connections and Wiring Diagrams

---

Internal Switching

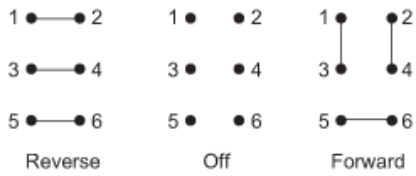

Three-Phase Wiring Diagram

