


HC40 Series




200 AMP - MULTI POSITION 400 Amp Mains c/w Blank Wiring Comp.

CATALOGUE #	DESCRIPTION	METER POSITIONS	ENCLOSURE SIZE A X B X C	WEIGHT
HC42R	2 gang, c/w blank compartment on left side	2	22 ³ / ₄ " x 6 ¹ / ₄ " x 28"	48 lbs.
HC43R	3 gang, c/w blank compartment on left side	3	22 ³ / ₄ " x 6 ¹ / ₄ " x 37 ³ / ₈ "	65 lbs.
HC44R	4 gang, c/w blank compartment on left side	4	22 ³ / ₄ " x 6 ¹ / ₄ " x 46"	83 lbs.
HC45R	5 gang, c/w blank compartment on left side	5	22 ³ / ₄ " x 6 ¹ / ₄ " x 56 ¹ / ₈ "	103 lbs.
HC46R	6 gang, c/w blank compartment on left side	6	22 ³ / ₄ " x 6 ¹ / ₄ " x 65 ¹ / ₂ "	121 lbs.

- Double entrance holes (top)
- Factory Bussed 400 Amp Mains
- 200 Amp, 600 VOLT per position
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- CSA weatherproof enclosure 3
- Approved conductor range:
Line 1 No. 2 - 600 MCM CU/AL
or two - 1/0 - 250 MCM CU/AL
Load No. 6 - 250 MCM CU/AL
- May be field converted for use with single stud 500 mcm

- For overhead order "HD" series hub separate
- Add suffix "H" for right hand entry, contact office for cost
- Approved for overhead & underground installations
- Use SXX503 for 5th jaw at 9 O'clock
- Use SXC022 for water heater lug kit

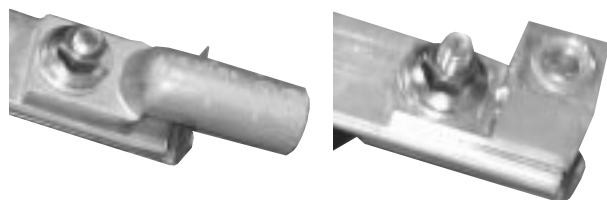

KNOCKOUT CODE	CONDUIT SIZE
G	1 ¹ / ₄ ", 1 ¹ / ₂ ", 2", 2 ¹ / ₂ "
S	3", 3 ¹ / ₂ ", 4"
AA	1 ¹ / ₂ "

