

# Technical Information Bulletin

## Design LED Filament Lamps




Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67663  
 Description: G25/S3/4.5W/27K/O/FIL/STD  
 UPC: 69549676633  
 Case quantity: 10 / 40

### PHYSICAL DATA

Shape: G25  
 Base: E26  
 Finish: Clear  
 Filament type: Oblique

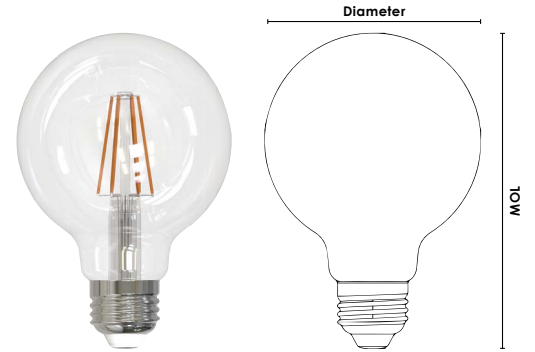

MOL : 4 5/8 in. (118 mm) Dia. : 3 1/8 in. (80 mm)

### PERFORMANCE DATA

Watts (W): 4.5  
 Volts (VAC): 120  
 Colour temp. (K)<sup>1</sup>: 2 700  
 Lumen output (lm)<sup>2</sup>: 450  
 Lumen per Watts (lm/W): 100  
 Traditional equivalent (W): 40  
 CRI: 80  
 Life L70 (h): 15 000  
 Beam angle (°): 360  
 Power factor: 0.9  
 Frequency (Hz): 60  
 Dimming: Forward and reverse  
 Burning position: Universal  
 Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %  
<sup>2</sup> Initial lumens range: +/- 5 %

### COMPATIBLE DIMMERS

BRAND	MODEL
LEGRAND	RH703PTUTC
COOPER	RRD-6NA
LEVITON	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
LUTRON	AYCL-253P, CTCL-153P, DVCL-253P, DVRP-253P, MACL-153P, PD-5NE, SELV-300P



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.