

Product data sheet

Characteristics

XZCRV1512041C2

jumper cable XZ - male straight M12 4-pin -
female elbowed M12 4-pin - PVC 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins elbowed screw-on
Collar material	Metal
Cable composition	4 x 0.25 mm ²
Cable length	6.56 ft (2 m)
Wire insulation material	PVC
Cable outer diameter	0.18 in (4.6 mm)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.24 lb(US) (0.11 kg)

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

Packing Units

Package 1 Weight	0.21 lb(US) (0.096 kg)
Package 1 Height	0.150 dm
Package 1 width	1.800 dm
Package 1 Length	2.900 dm


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

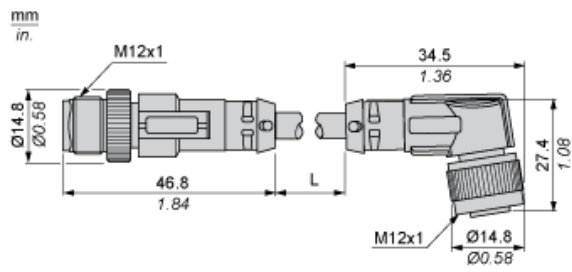

L : Length of cable

Connections and Schemes

