

# XVBC07

Base unit for modular tower lights, Harmony XVB, plastic, black, 70mm, bottom or side cable entry



## Main

Range of Product	Harmony XVB Universal
Product or Component Type	Base unit
Component name	XVBC
Material	Glass reinforced polyamide: base unit

## Complementary

Fixing Mode	Direct or tube fixing
Mounting diameter	2.76 in (70 mm)
Product destination	Banks without flash discharge tube unit
Electrical connection	1 connector standard input
Cable entry	Bottom or side entry
Assembly style	Customer assembly, up to 5 units
Terminals description ISO n°1	(COM-2)PW (COM-3)PW (COM-1)PW (GND)GROUND (COM-4)PW (COM-5)PW
Net Weight	0.35 lb(US) (0.16 kg)

## Environment

Product Certifications	CCC[RETURN]EAC[RETURN]CSA C22-2 No 14[RETURN]UL 508
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
NEMA degree of protection	Type 4X UL indoor)

## Ordering and shipping details

Category	22611-XVB-STACKLIGHTS
Discount Schedule	XV
GTIN	3389110845037
Returnability	Yes
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.94 in (10 cm)
Package 1 Width	4.72 in (12 cm)
Package 1 Length	3.94 in (10 cm)
Package 1 Weight	6.00 oz (170 g)
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	11.81 in (30 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	15.43 lb(US) (7 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	144
Package 3 Height	17.72 in (45 cm)
Package 3 Width	23.62 in (60 cm)
Package 3 Length	31.50 in (80 cm)
Package 3 Weight	80.47 lb(US) (36.5 kg)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


## Contractual warranty

Warranty	18 months
----------	-----------

Indicator Bank with "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

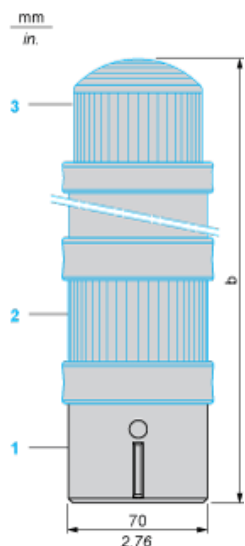

- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) "Flash" unit XVBC•••, to be ordered separately


Number of illuminated or audible signalling units other than "flash" tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06

---

Base Unit for Indicator Banks

---

Panel Cut-out for Direct Fixing



---

## Illuminated Beacon

---

### Wiring Diagram

