

ALUMINUM PRE-INSULATED PENN-SLEEVES

• TYPE PIK 840

For aluminum to copper or aluminum to aluminum




Pre-insulated Penn-Sleeve Service Entrance Compression Connectors for commercial service or large residence.

Prefilled with Cual-Aid inhibitor and capped to prevent dirt from accumulating in barrel and seal out moisture. Polyethylene colour coded caps conform to industry standard.

Aluminum insert is anchored to jacket, assuring that insert is under die when crimping where marking indicates. Marked for both hand and hydraulic tools.

Nylon jacket insulates connector electrically and protects against water and weather. Special nylon formulated for Penn-Union increases shelf life and improves crimpability even at sub zero temperatures.

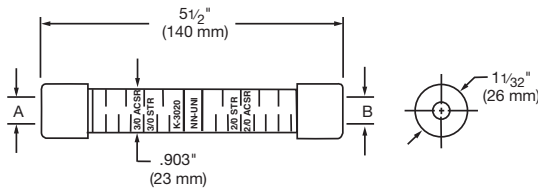

Part #	A Range		Wire Diameter Range in	Colour Code A Range	B Range			Wire Diameter Range in	Colour Code B Range	Die Size	
	ACSR	Alum. or Copper			ACSR	Alum. or Copper				Hand	Hyd.
		Str.	Str.	Sol.							
PIK01R	1/0	1/0	.373-.398	Yellow	2	1-2	1/0	.292-.332	Red	.840	B-249 or EEI 11A
PIK00R	1/0	1/0	.373-.398	Yellow	1/0	1/0		.373-.398	Yellow		
PIK204	2/0	2/0	.419-.447	Gray	6	5-6	4	.183-.206	Blue		
PIK202	2/0	2/0	.419-.447	Gray	4	3-4	2	.231-.258	Orange		
PIK201	2/0	2/0	.419-.447	Gray	2	1-2	1/0	.292-.332	Red		
PIK200	2/0	2/0	.419-.447	Gray	1/0	1/0		.373-.398	Yellow		
PIK2020	2/0	2/0	.419-.447	Gray	2/0	2/0		.419-.447	Gray		
PIK302	3/0	3/0	.470-.502	Black	4	3-4	2	.231-.258	Orange		
PIK301	3/0	3/0	.470-.502	Black	2	1-2	1/0	.292-.332	Red		
PIK300	3/0	3/0	.470-.502	Black	1/0	1/0		.373-.398	Yellow		
PIK3020	3/0	3/0	.470-.502	Black	2/0	2/0		.419-.447	Gray		
PIK3030	3/0	3/0	.470-.502	Black	3/0	3/0		.470-.502	Black		
PIK402	4/0	4/0	.528-.563	Pink	4	3-4	2	.231-.258	Orange		
PIK401	4/0	4/0	.528-.563	Pink	2	1-2	1/0	.292-.332	Red		
PIK400	4/0	4/0	.528-.563	Pink	1/0	1/0		.373-.398	Yellow		
PIK4020	4/0	4/0	.528-.563	Pink	2/0	2/0		.419-.447	Gray		
PIK4030	4/0	4/0	.528-.563	Pink	3/0	3/0		.470-.502	Black		
PIK4040	4/0	4/0	.528-.563	Pink	4/0	4/0		.528-.563	Pink		

