PROJECT: DATE:

DISTRIBUTOR: CATALOGUE #: TYPE:

DRAWN BY: CONTRACTOR: PO:

RMS
STEEL RUNNING MAN SIGN

STANPRO

SPEC SHEET

SPECIFICATION GRADE SIGN

FEATURES AND SPECIFICATIONS

CIRCUITRY - AC & AC/DC

- Nichia LED ultra bright light source
- 120/277/347 V AC Input, field selectable
- Emergency DC wattages as follows:
  6 V DC = 0.9 W, **12 V DC** = 0.9 W,
  24 V DC = 0.9 W

CIRCUITRY - CEREBRUM

- Emergency DC wattage as follow:
  24 V DC = 0.10 A/2.4 W
- This unit can be connected to Cerebrum's smart battery unit. Please view the Cerebrum brochure for more details on this technology.

CIRCUITRY - SELF-POWERED

- Nichia LED ultra bright light source
- 120/277/347 V AC Input, field selectable
- High-performance, Ni-Cad battery
- 90 or 120 minutes emergency duration
- Solid state transfer and battery charger

MECHANICAL

- 20 gauge steel construction
- Universal faces
- Universal mounting: ceiling mount, wall mount, end mount
- White powder coat finish standard, other colors optional

APPROVALS

- CSA Certified to C22.2 #141-15, C860

COMPLIANCE

- Meets requirements of ICES-005

TECHNICAL DRAWINGS

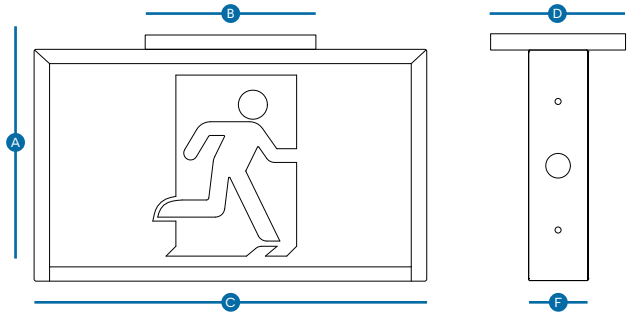

A	B	C	D	E	F
7 3/4" (19.7 cm)	5 5/8" (14.3 cm)	12" (30.5 cm)	4 3/8" (11.1 cm)	1/2" (1.3 cm)	2 1/4" (5.7 cm)

* Please refer to the product web page to view detailed drawings by size.

Energy Verified
Énergie Vérifiée

V: 01-28-2026

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

TYPICAL SPECIFICATION

Supply and install Stanpro RMS Series, all steel Running Man Exit Signs. The sign shall operate with AC/DC field selectable 120/277/347 V AC Input, field selectable Emergency DC voltage as follows 6 V 0.9 W, 12 V 0.9 W, 24 V DC 0.9 W. The Self powered configuration shall be AC field selectable 120/277/347 V and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Nichia LED ultra-bright light source. The sign shall be suitable for wall, end, or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and back plate shall each be of a one-piece steel construction. The Exit Running Man Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Stanpro model number RMS_____.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE[1]

Type	Model Number	DC volts (V DC)	Number of Face	Light Source	Input Volts (V AC)	Color
	RMS0WH-IB1	IB1	Universal	LED	120/277/347	White
	RMS0WH-UDC	UDC	Universal	LED	120/277/347	White

[1] QUIK SHIP : Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

RMS			-	/
Series	No. of faces	Color	DC Volts* (V DC)	Options
RMS	**0** Universal faces **1** Single face **2** Double face	**WH** White (standard) **BK** Black **GY** Grey **SP** Custom color (please specify)	**UDC** Universal DC backup voltage from 6 to 24 **IB** Self-powered for 90 minutes **IB1** Self-powered for 120 minutes **CER** Cerebrum driver	**AT[1], BO, K5, PGD, OP, TP, WO, WGD[2], LB** **0** No indicators (double face only) **D U UR DR DL UL** **Note :** Indicators option available for single & double option only.

* If AC only is required, select the UDC option and do not connect the DC wires when installing.
[1] AT available with IB and IB1.
[2] Specify mounting.

POWER CONSUMPTION TABLE

Model	Voltage	Power	Current
RMS-IB	120 V	2 W	0.024 A
	277 V	1.5 W	0.007 A
	347 V	1.9 W	0.008 A
RMS-IB1	120 V	3.35 W	0.034 A
	277 V	2.63 W	0.01 A
	347 V	3.31 W	0.012 A
RMS-UDC	120 V	1.8 W	0.022 A
	277 V	1.4 W	0.006 A
	347 V	1.7 W	0.007 A

V: 01-28-2026

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

EMERGENCY LIGHTING OPTIONS

Option	Description
AT[1]	Automatic test Self-diagnostic
BO	Black Out Option (special wording)
K5	1/2" Knockout for pendant mount
OP	Special Wording
PGD	Lexan Guard (separate order)
TP	Tamper Proof Screws
WGD[2]	Wireguard (separate order)
WO	White Out Option (special wording)
LB	Low Brightness

WIREGUARD[3]

	Model Number	Dimensions
Wall Mount	WGD520-V2	15.75 x 11.5 x 4.5
Ceiling Mount	WGD540-V2	18.25 x 9.75 x 10.5
End Mount	WGD650-V2	17.75 x 17.75 x 16.50

[3] Please contact your STANPRO customer service representative for more information.

LEXAN GUARD

	Model Number	Dimensions
Wall Mount	PGD109	14 x 9.75 x 3.5
Ceiling Mount	PGD110	14 x 5.75 x 10
End Mount	PGD106	5.5 x 9.25 x 18.5

CONFIGURATIONS

Comes standard (single and universal face) with three pictogram legends for direction selection.

Comes standard (double face) with two pictogram legends.

For double face no arrow options, select “No indicators” on the options column.

V: 01-28-2026

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.