


# Product data sheet

Specifications



## Head for pilot light, Harmony XB5, plastic, red, 22mm, plain lens, BA9s base fitting

ZB5AV043S

**Product availability:** Stock - Normally stocked in distribution facility

**Important message:** A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

### Main

|                                 |                      |
|---------------------------------|----------------------|
| Range of Product                | Harmony XB5          |
| Product or Component Type       | Head for pilot light |
| Product Compatibility           | Universal LED        |
| Device short name               | ZB5                  |
| Bezel material                  | Dark grey plastic    |
| Mounting diameter               | 0.9 in (22 mm)       |
| Head type                       | Standard             |
| Sale per indivisible quantity   | 1                    |
| Shape of signaling unit head    | Round                |
| Cap/operator or lens colour     | Red                  |
| Operator additional information | With grooved lens    |

### Complementary

|                             |                                                                                                                                                       |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width           | 1.1 in (29 mm)                                                                                                                                        |
| CAD overall height          | 1.1 in (29 mm)                                                                                                                                        |
| CAD overall depth           | 1.2 in (31 mm)                                                                                                                                        |
| Product Weight              | 0.037 lb(US) (0.017 kg)                                                                                                                               |
| Station name                | XALD 1...5 cut-outs<br>XALK 2...5 cut-outs                                                                                                            |
| Electrical composition code | P1 front mounting integral LED<br>P2 front mounting integral LED and transformer<br>PF1 front mounting integral LED<br>PR1 rear mounting integral LED |
| Device presentation         | Basic element                                                                                                                                         |

### Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Protective treatment                  | TH                               |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)       |
| Ambient Air Temperature for Operation | -40...158 °F (-40...70 °C)       |
| Overvoltage category                  | Class II conforming to IEC 60536 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                    |                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection            | IP66 IEC 60529<br>IP67 IEC 60529<br>IP69 IEC 60529<br>IP69K ISO 20653                                                       |
| Enclosure Type                     | UL type 4X/13                                                                                                               |
| Resistance to high pressure washer | 1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m                                                                                |
| IK degree of protection            | IK05 conforming to IEC 50102                                                                                                |
| Standards                          | IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-5-1<br>UL 508<br>IEC 60947-1<br>IEC 60947-5-4<br>IEC 60947-5-5<br>JIS C8201-1 |
| Environmental characteristic       | High ambient lighting environment                                                                                           |
| Vibration resistance               | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                            |
| Shock resistance                   | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27          |

## Ordering and shipping details

|                   |               |
|-------------------|---------------|
| Category          | US10CS222467  |
| Discount Schedule | 0CS2          |
| GTIN              | 3389110326826 |
| Returnability     | Yes           |
| Country of origin | FR            |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Nbr. of units in pkg.        | 1                       |
| Package 1 Height             | 1.9 in (4.8 cm)         |
| Package 1 Width              | 2.1 in (5.4 cm)         |
| Package 1 Length             | 1.4 in (3.6 cm)         |
| Package weight(Lbs)          | 0.5 oz (15.0 g)         |
| Unit Type of Package 2       | S02                     |
| Number of Units in Package 2 | 150                     |
| Package 2 Height             | 5.9 in (15.0 cm)        |
| Package 2 Width              | 11.8 in (30.0 cm)       |
| Package 2 Length             | 15.7 in (40.0 cm)       |
| Package 2 Weight             | 5.941 lb(US) (2.695 kg) |

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                |
|--------------------------------------------------------|----------------|
| Total lifecycle Carbon footprint                       | 0.1 kg CO2 eq. |
| Carbon footprint of the manufacturing phase [A1 to A3] | 0.1 kg CO2 eq. |
| Carbon footprint of the distribution phase [A4]        | 0 kg CO2 eq.   |
| Carbon footprint of the installation phase [A5]        | 0 kg CO2 eq.   |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 0 kg CO2 eq.   |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 0 kg CO2 eq.   |

## Use Better



### Materials and Substances

|                                                |                                                                             |
|------------------------------------------------|-----------------------------------------------------------------------------|
| Average percentage of recycled plastic content | 16 %                                                                        |
| Packaging made with recycled cardboard         | Yes                                                                         |
| Packaging without single use plastic           | Yes                                                                         |
| EU RoHS Directive                              | <a href="#">Compliant</a>                                                   |
| REACH Regulation                               | <a href="#">Free of Substances of Very High Concern above the threshold</a> |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                               |                                         |
|-------------------------------|-----------------------------------------|
| Recyclability potential, in % | 22                                      |
| Circularity Profile           | <a href="#">End of Life Information</a> |
| Take-back                     | No                                      |

Dimensions Drawings

Dimensions

---



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. }_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. }_0^{+0.016}$ )

### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Panel Cut-outs (Viewed from Installer's Side)




**A:** 30 mm min. / 1.18 in. min.

**B:** 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

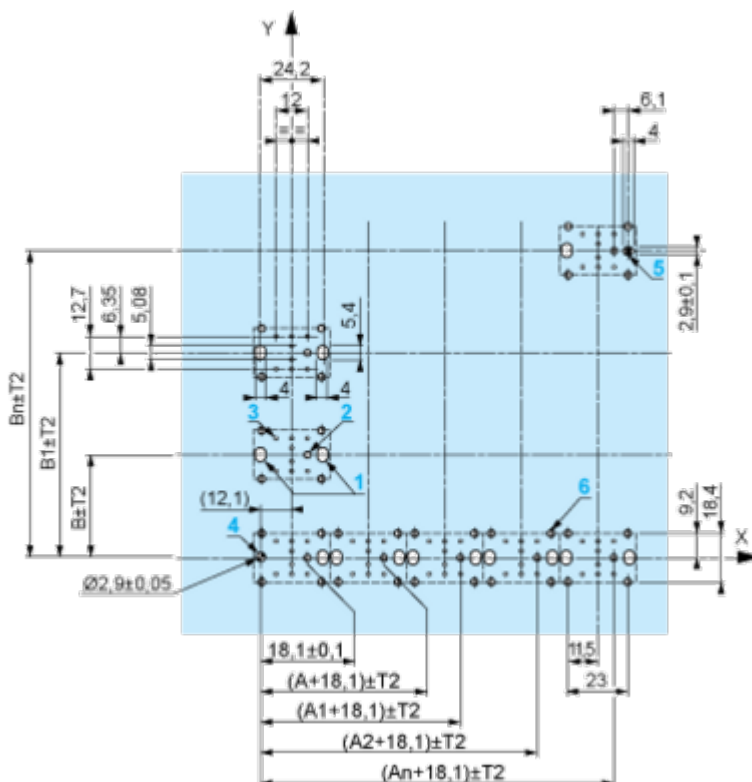

**A:** 30 mm min.

**B: 40 mm min.**

Dimensions in in.

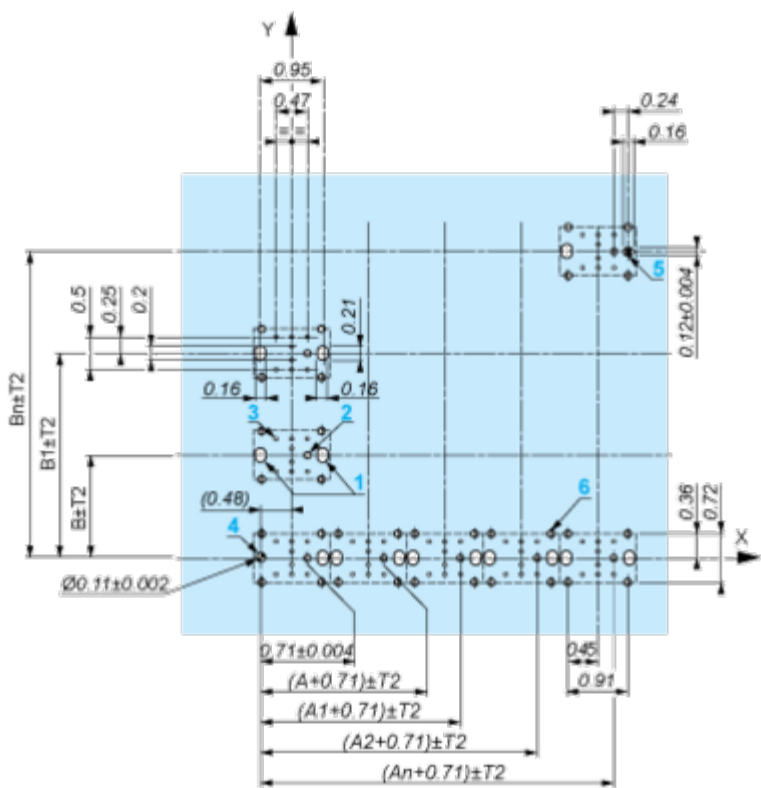

A: 1.18 in. min.  
B: 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.:  $T1 + T2 = 0.3$  mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm$  0.1 / 0.88 in.  $\pm$  0.004
- Orientation of body/fixing collar ZB5AZ009:  $\pm 2^\circ 30'$  (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB5AD\*, ZB5AJ\*, ZB5AG\*).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.



- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

## Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 for centring adapter ZBZ01•
- 3 8  $\times$   $\varnothing$  1.2 mm / 0.05 in. holes
- 4 1 hole  $\varnothing$  2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes  $\varnothing$  2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



Electrical Composition Corresponding to Codes M6 and P2

---



Legend

---

Single contact



Double contact



Light block




Possible location



Technical Illustration

Dimensions

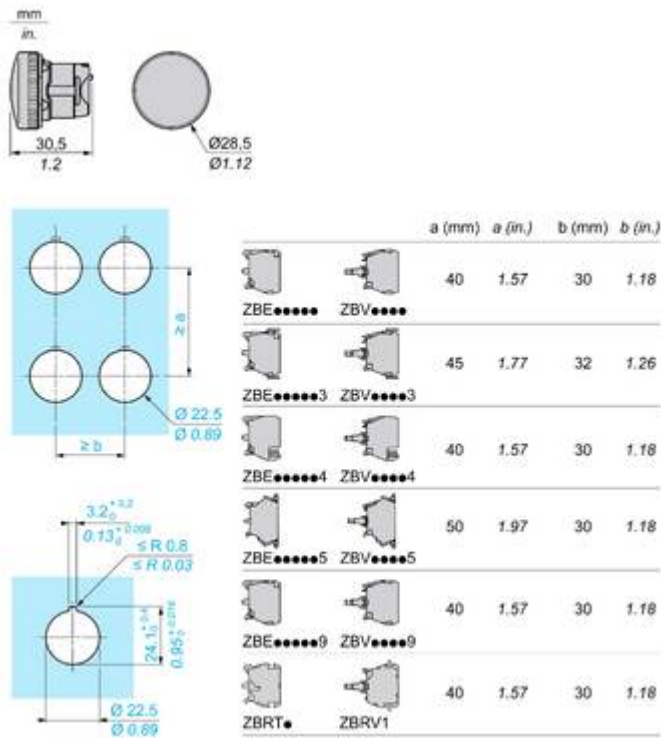

Offer Marketing Illustration

Product benefits / Features

### Features

Harmony XB4/XB5 Illuminated functions



NEW universal LED Block for all colors





Simple stock management



Improved installation time and easy selection







Improved color intensity and brightness



Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative

---

