


# Product data sheet

## Characteristics

# 8501XUDO40V63

Relay, Harmony 8501X, utility, coil, 10A resistive at 600V AC, 125V DC, 250V DC Voltage, 4NO

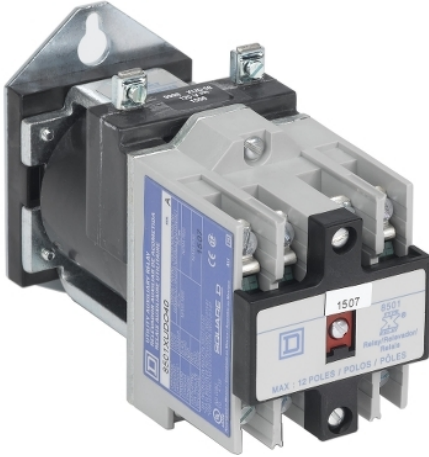

### Main

Range	8501X
Relay Type	Utility
Product	Relay
Current Rating	10 A AC 5 A DC
Contact Configuration	4 NO 4 standard contact cartridges
Number of Poles	4P
Coil Voltage	125 V DC
Voltage Rating	250 V DC
Mounting Type	Panel
Operating Temperature	-40...160 °F (-40...71 °C)
Electrical Connection	Screw clamp terminals
Certifications	UL Listed[RETURN]CE[RETURN]CSA
Operating Time	37 ms - pick-up 21 ms - drop-out
Height	3.56 in (90.42 mm)
Width	2.23 in (56.64 mm)
Depth	5.17 in (131.32 mm)

### Ordering and shipping details

Category	21157-8501 XDO (DC)
Discount Schedule	CP2
GTIN	785901743316
Returnability	No
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.31 in (8.4 cm)
Package 1 Width	4.69 in (11.9 cm)
Package 1 Length	9.21 in (23.4 cm)
Package 1 Weight	3.24 lb(US) (1.47 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	252
Package 2 Height	40.00 in (101.6 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	837.75 lb(US) (379.998 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Contractual warranty

Warranty	18 months
----------	-----------