


Product data sheet

Characteristics

8736SCO2V02

NEMA Starter, Type S, reversing, horizontal, Size 1, 27A, 3 HP at 230 VAC, 5 kA SSCR, 1 phase, 2 pole, melting alloy overload, 120 VAC coil, open

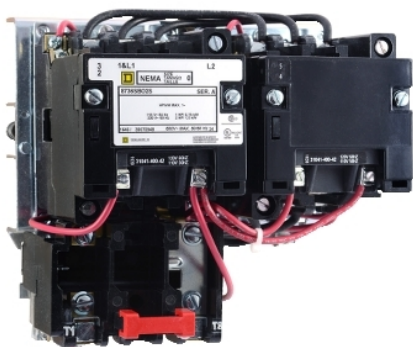

Main

Product Type	Starter
Product Range	S
Starter Type	Reversing

Complementary

NEMA Size	1
Rated Current	27 A
Number of Poles	2P
Mounting Orientation	Horizontal
Wiring Mode	3 wires
Maximum Voltage Rating	600 V AC
Phase	1 phase
Type of Overload	Melting alloy 1
Horsepower Rating	3 HP 230 V AC 2 HP 115 V AC
SCCR	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC
Coil Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Screw clamp terminals
Height	6.91 in (175.51 mm)
Width	7.13 in (181.10 mm)
Depth	5.31 in (134.87 mm)

Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed[RETURN]CSA

Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.93 in (17.6 cm)
Package 1 Width	7.13 in (18.1 cm)
Package 1 Length	5.31 in (13.5 cm)
Package 1 Weight	7.65 lb(US) (3.47 kg)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
EU RoHS Directive	Not compliant

Contractual warranty

Warranty	18 months
----------	-----------