

# XVC1B1HK

Complete pre wired monolithic tower light, Harmony XVC1, plastic, red, 100mm, steady or flashing, with siren, 24V DC



## Main

Range of Product	Harmony XVC1
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Siren
Mounting diameter	3.94 in (100 mm)
Component name	XVC
Light source	LED steady or flashing red
[Us] rated supply voltage	24 V
Supply circuit type	DC
Noise level	0...102 dB continuous or intermittent tone)1 m

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product mounting	On base
Cable cross section	0.00 In <sup>2</sup> (0.83 mm <sup>2</sup> ) 0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG Gauge	AWG 18 AWG 22
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	460 mA
Flashing frequency	0.7...3 Hz
Net Weight	3.48 lb(US) (1.58 kg)
Height	11.54 in (293 mm)

## Environment

Standards	IEC 61000-6-4 IEC 61000-6-2 IEC 61000-6-3
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	-4...122 °F (-20...50 °C)
Electrical shock protection class	Class II IEC 61140
IP degree of protection	IP54 IEC 60529

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.09 in (18.000 cm)
Package 1 Width	16.93 in (43.000 cm)
Package 1 Length	7.09 in (18.000 cm)

Package 1 Weight	4.87 lb(US) (2.210 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	29.53 in (75.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	57.89 lb(US) (26.260 kg)


### Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

Pre-assembled and Pre-wired Tower Light with Siren

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

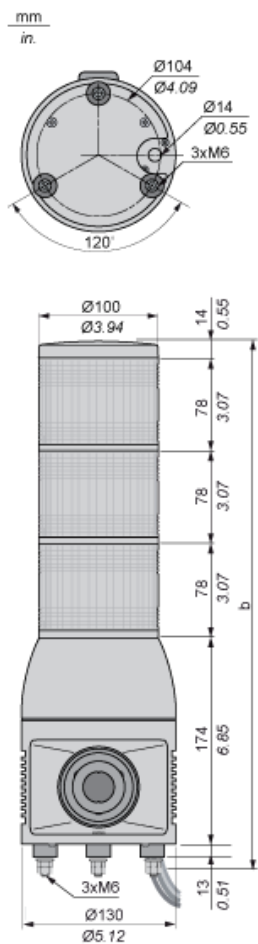

No. of illuminated units	b in mm	b in in.
1	293	11.54
2	371	14.61
3	449	17.68

