


ORDERING INFORMATION

Order code: 10291
 Description: E240T12PRS347/N
 UPC: 69549102910

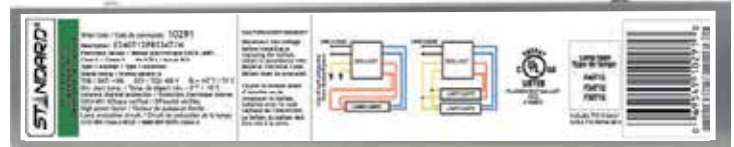

SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Program Rapid Start	Contains PCBs:	No
Lamp connection:	Series	Sound rating:	A
Input voltage (V):	347	Open current voltage (OCV) (V):	450
Input frequency (Hz):	50/60	Inherent thermal protection:	Yes
Max. case temperature:	75 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A RFLD
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
347 VOLTS										
F40T12 (40W)	2	40	0/-18	0.20	70	0.86	10	0.99	1.7	1.23
F34T12 (34W)	2	34	0/-18	0.18	62	0.86	10	0.99	1.7	1.39
F30T12 (30W)	2	30	0/-18	0.17	60	0.85	10	0.99	1.7	1.42
F40T12 (40W)	1	40	0/-18	0.12	40	0.88	15	0.98	1.7	2.20
F34T12 (34W)	1	34	0/-18	0.11	38	0.88	20	0.97	1.7	2.32
F30T12 (30W)	1	30	0/-18	0.10	36	0.95	10	0.99	1.7	2.64

WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. March 9, 2015

ORDERING INFORMATION

Order code: 10291
 Description: E240T12PRS347/N
 UPC: 69549102910

WIRING DIAGRAM

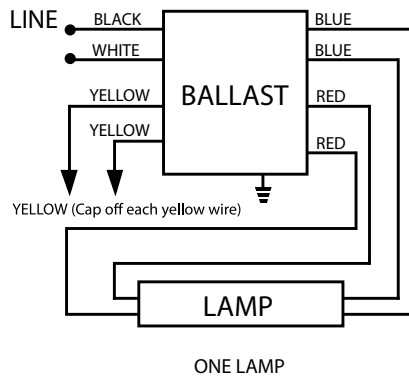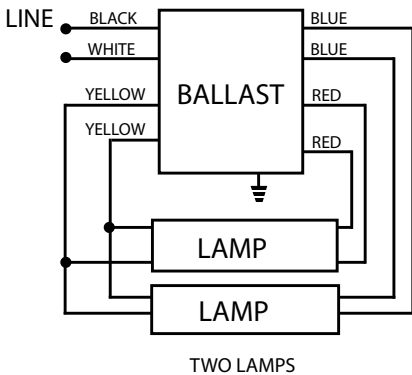


LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118.0 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.1 cm)
Width (W):	1.70" (4.3 cm)
Height (H):	1.14" (2.9 cm)
Mounting (M):	8.90" (22.6 cm)

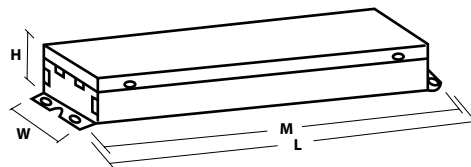

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015