

RT-MINI II


A Self-flashing PV Mount Featuring Roof Tech's AlphaSeal®



RT-MINI II is suitable for any conventional L-Foot

- No Caulking or Pre-Drilling Required
- Universal Attachment to Any Slope
- Metal, EPDM, TPO, SBS, & Asphalt
- Wide Range of Applications & Ultimate Flexibility on the Roof
- No Need to Bend Rails
- N-S & Rotational Adjustments

Installation Manual

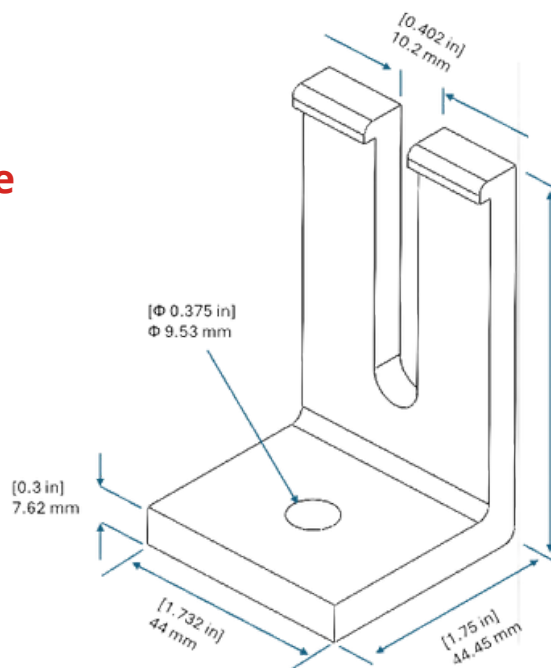

**RT L-Foot Bracket
Comes in Black Coated or Mill Finish.**



Roof Tech

www.roof-tech.us info@roof-tech.us




RT-MINI II

Flexible Flashing Certified by the International Code Council (ICC)

Components

RT2-00-MINIBK2-FSET

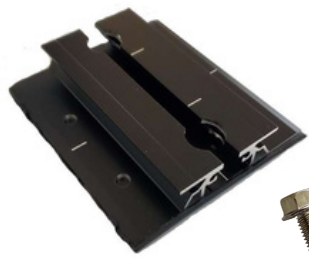

MINI II base : 20 ea.
Screw : 40 ea.
Bolt & Nut Set: 20 ea.
Extra RT-Butyl : 4 ea.

Optional Items:

5 x 60mm Mounting Screw (RT2-04-SD5-60) : 100 ea./Bag


RT L-Foot: 20 ea.

RT2-04-LFT4476 - Mill - 0 L-Foot Slotted 3/8"

RT2-04-LFT4476 - BLK - 0 L-Foot Slotted 3/8"


RT-Butyl(RT2-04-MNBUTYL) :10 ea./Box

Dimensions in (mm)

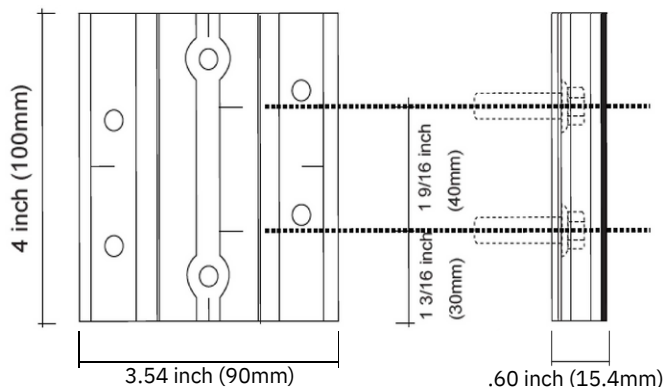


Deck Installation

OSB & PLYWOOD ONLY

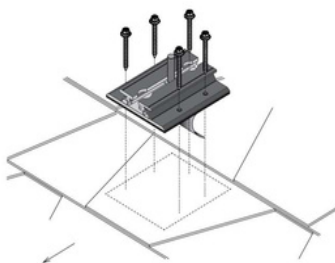


Rafter Installation

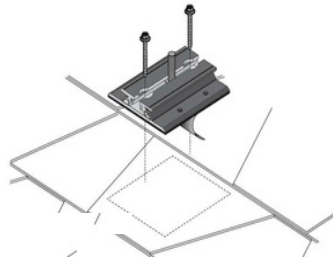


Hybrid Installation

Rafter and Deck

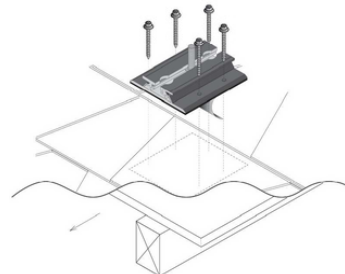

Offset Rafter Attachment Options

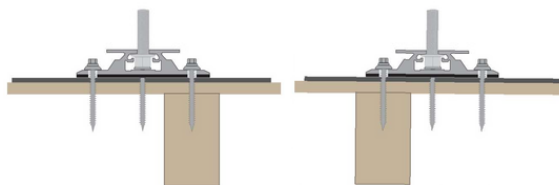

Roof Tech Inc. AlphaSeal™ Technology has been used on over one million residential PV systems since 1994. It is the first PV mounting system with Flexible Flashing certified by the ICC, engineered to withstand wind speeds up to 180 mph and ground snow up to 90 psf.

Engineered to ASTM D 1761

(Standard Test Methods for Mechanical Fasteners in Wood)

Flexible Flashing ICC ESR-3575



P.E. Letters



Support & Downloads



ICC ESR-3575

Roof Tech Inc.

www.roof-tech.us

10620 Trenea Street, Suite 230, San Diego, CA 92131

858.935.6064