

Technical Information Bulletin


DESIGN LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67616
Description: GU10/7W/40K/45/DESIGN/STD
UPC: 69549676169
Case quantity: 10/100

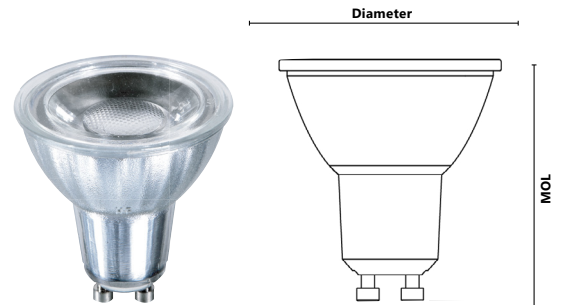

MOL: 2 5/32" (55 mm) Dia.: 1 31/32" (50 mm)

PHYSICAL DATA

Type: GU10
Base: GU10
Material: Glass
Lens type: Clear

PERFORMANCE DATA

Watts (W): 7
Lamp volts (VAC): 120
Colour temperature (K)¹: 4 000
Life L70 (hrs): 25 000
Lumens (lm)²: 530
Lumens per watt (lm/W): 76
Traditional equivalent (W): 50
CRI: 80
Beam angle (°): 45
CBCP (cd): 600
THD (%): 50
Frequency (Hz) 60
Power factor: 0.8
Operating temperature range: -20°C to 45°C (-4°F to 113°F)

¹ Typical colour temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Leviton	6615, IPE04-1LZ
Lutron	PD-5NE, RRD-6NA*, DVCL-253P, DVRP-253P*, SELV-300P

* Low noise might occur within the dimming range



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.