

## Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or Component Type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys Deca TeSys GV2 TeSys K TeSys U
Number of tap-offs	4
[I <sub>th</sub> ] conventional free air thermal current	63 A
Connection pitch	2.13 in (54 mm)

## Complementary

Mounting Location	On terminal
[Ui] Rated Insulation Voltage	690 V
Length	8.11 in (206 mm)
Net Weight	0.19 lb(US) (0.085 kg)

## Ordering and shipping details

Category	22367-MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	3389110555875
Returnability	Yes
Country of origin	RO

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.75 in (1.900 cm)
Package 1 Width	1.46 in (3.700 cm)
Package 1 Length	8.50 in (21.600 cm)
Package 1 Weight	3.10 oz (88.000 g)
Unit Type of Package 2	S01
Number of Units in Package 2	50
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	5.91 in (15.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	10.20 lb(US) (4.628 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	1600
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)

Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	345.02 lb(US) (156.500 kg)


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

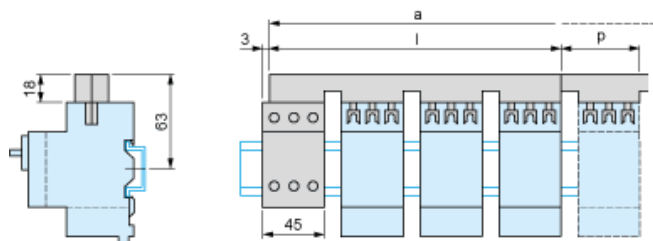

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548