


# STBNIC2212

network interface module, Modicon STB,  
standard, Ethernet/IP, 10-100Mbit/s

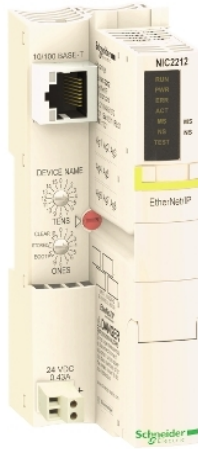

## Main

Range of Product	Modicon STB distributed I/O solution
Product or Component Type	Standard Network Interface Module
Integrated connection type	Ethernet/IP IEEE 802.3 female RJ45 double shielded twisted pair via Ethernet network) Ethernet/IP IEEE 802.3 HE-13 RS232 port) Ethernet/IP IEEE 802.3 8-way female RS232 port)
Port Ethernet	10BASE-T/100BASE-T
Exchange mode	Half or full duplex
Number of segments	1 primary, maximum 6 extensions
Number of devices per segment	0...256
Transmission rate	10/100 Mbit/s

## Complementary

Number of addressable I/O module	0...32 per island
Communication Service	Embedded web (configuration,diagnostics and access to variable) BootP/DHCP protocol SNMP agent
[Us] rated supply voltage	24 V DC
Power supply type	SELV
Maximum supply current	700 A
Supply voltage limits	19.2...30 V
Input current	430 mA supply circuit
Nominal output current	0.575 A 140...158 °F (60...70 °C) 1.2 A
Output voltage	5.25 V DC +/- 0.21 %)logic bus
Marking	CE
Overvoltage category	II
Status LED	1 LED ACT 1 LED island state (RUN) 1 LED module error (ERR) 1 LED MS 1 LED NS 1 LED power supply (PWR) 1 LED test mode (TEST)
Depth	2.76 in (70 mm)
Height	1.57 in (40 mm)
Width	5.05 in (128.3 mm)
Net Weight	0.32 lb(US) (0.145 kg)

## Environment

Standards	FM Class 1 division 2, groups A, B, C and D T4A with 70 °C IEC 61131-2 : 2003
Product Certifications	UL[RETURN]ODVA[RETURN]C-tick[RETURN]CSA
Pollution degree	2 IEC 60664-1
Operating altitude	<= 6561.68 ft (2000 m)
IP degree of protection	IP20 conforming to IEC 61131-2 class 1
Ambient air temperature for operation	32...140 °F (0...60 °C) without derating) -13...158 °F (-25...70 °C) with derating factor)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % 140 °F (60 °C) without condensation

Vibration resistance	3 gn 58...150 Hz 35 x 7.5 mm symmetrical DIN rail 5 gn 58...150 Hz 35 x 15 mm symmetrical DIN rail +/-0.35 mm 10...58 Hz
Shock resistance	30 gn 11 ms IEC 88 reference 2-27

### Ordering and shipping details

Category	18215-ADVANTYS STB I/O
Discount Schedule	PC32
GTIN	3595863987812
Returnability	Yes
Country of origin	FR

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.69 in (4.300 cm)
Package 1 Width	2.83 in (7.200 cm)
Package 1 Length	5.12 in (13.000 cm)
Package 1 Weight	5.82 oz (165.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	11.78 lb(US) (5.345 kg)

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

### Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

