



Nylon Insulated Support Sleeve

Nylon insulated colour coded barrel styles offer the ultimate in high-performance terminal design and construction. Tin-plated brass sleeve strengthens barrel and secures wire to protect against stress and high vibration. Permanently-attached colour-coded Nylon insulating sleeve extends beyond the metal support sleeve. Funnel ferrule wire entrance into electrical barrel eliminates wire strand 'hang-up', increases crimping rates and wire termination reliability. Operating Temperature Range: continuous duty from -67°F to 221°F (-55°C to 105°C).

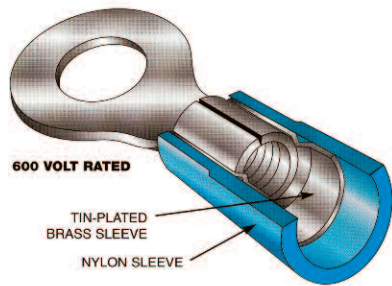

Copper Solid and Stranded Wire Only




16-14 WIRE RANGE

.032 Stock

600 Volts

Stud Size	Part Number	Stud Size	Part Number
4-6	R6B6S	10	BS6B10
4-6	R6B6		Seamless Butt B8B
6-8	R6B8		
8-10	R6B10		
12-1/4	R6B14S		
1/4-5/16	R6B56S		
5/16-3/8	R6B38		
4-6	BS6B6S Block Spade		
4-6	BS6B6		
8	BS6B8		



DIMENSIONAL CHART		
Part Number	W	L
B8B		1.058"
BS6B10	0.299"	0.880"
BS6B6	0.299"	0.897"
BS6B6S	0.246"	0.885"
BS6B8	0.298"	0.897"
R6B10	0.342"	1.033"
R6B38	0.530"	1.201"
R6B56S	0.464"	1.165"
R6B6	0.313"	0.980"
R6B6S	0.255"	0.935"
R6B8	0.313"	0.983"
R6B8S	0.252"	0.886"

Terminals accept .170" Max. Wire Ins. Dia.; Splices - .150"

Add suffix "M" for 1000 pack
 Add suffix "P" for Pro Pack (Quantities vary by Part #)

Approved installation tool: RHT-199/1928500130
 Economy installation tools: RAT-NYL, 453, HTS1000
 See pages E-2 to E-5 for installation tools.