

Technical Information Bulletin

LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67927
Description: CRN/S3/54W/50K/BYP/120-347/ND/E39/STD
UPC: 69549679276
Case quantity: 12

PHYSICAL DATA

Base: E39
Type: High Intensity 360°



PERFORMANCE DATA

Watts (W): 50
Install method: Ballast bypass
Lamp volts (VAC): 120-347
Colour temperature (K)¹: 5 000
Life L70 (hrs): 50 000
Bare lamp lumens (lm)²: 5 000
Bare lamp lumens per watt (lm/W): 100
CRI: 80
Beam angle (°): 360
Power factor: >0.9
THD (%): <20
Operating temperature range: - 40 °C to 45 °C (-40°F to 113 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %



* This product complies with UL1598C Standard for LED luminaire Retrofit kits. Not suitable for hazardous location.

DESCRIPTION AND OTHER OPTIONS

CRN360	/	S3	/	50W	/	50K	/	BYP	/	120-347V	/	ND	/	E39	/	STD
Family		Series		Watts		Colour temp.		Installation		Volts		Dimmable		Base		Brand
CRN LED High Intensity		S3 Series 3		36W 36 watts 50W 50 watts 115W 115 watts		30K 3 000 K 40K 4 000 K 50K 5 000 K		BYP Ballast bypass		120-347V 120-347 volts		ND Non-dimmable		E26 E26 medium E39 E39 mogul		STD Standard

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


Technical Information Bulletin

LED Lamps



ORDER CODE : 67927

TECHNICAL DRAWINGS AND DIMENSIONS

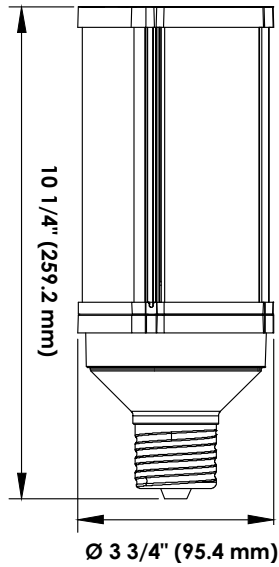

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____