

# Product data sheet

## Characteristics

# XVC1M3HK

Monolithic pre wired tower light, Harmony XVC, plastic, red orange green, 100mm, steady or flashing, siren, 100...240V AC



### Main

Range of Product	Harmony XVC1
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Siren
Mounting diameter	3.94 in (100 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	0...102 dB continuous or intermittent tone)1 m

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product mounting	On base
Cable cross section	0.00 In <sup>2</sup> (0.33 mm <sup>2</sup> ) 0.00 in <sup>2</sup> (0.83 mm <sup>2</sup> )
AWG Gauge	AWG 18 AWG 22
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current Consumption	320 mA
Flashing frequency	0.7...3 Hz
Net Weight	4.59 lb(US) (2.08 kg)
Height	17.68 in (449 mm)

### Environment

Standards	IEC 60947-1 IEC 60947-5-1
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	-4...122 °F (-20...50 °C)
Electrical shock protection class	Class I IEC 61140
IP degree of protection	IP54 IEC 60529

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.27 in (21.000 cm)
Package 1 Width	8.66 in (22.000 cm)
Package 1 Length	25.59 in (65.000 cm)
Package 1 Weight	9.09 lb(US) (4.125 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	4
Package 2 Height	30.31 in (77.000 cm)
Package 2 Width	31.50 in (80.000 cm)
Package 2 Length	23.62 in (60.000 cm)
Package 2 Weight	55.12 lb(US) (25.000 kg)


## Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Pre-assembled and Pre-wired Tower Light with Siren

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

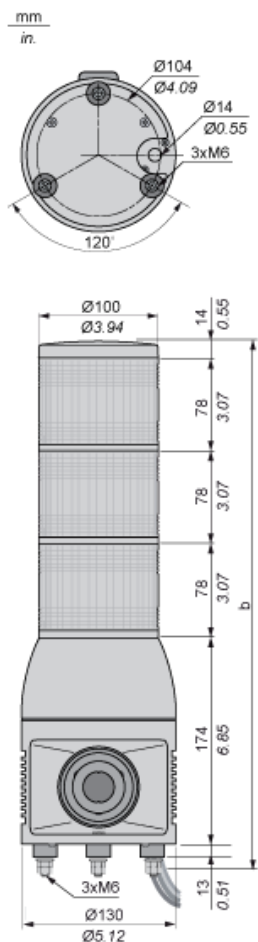

No. of illuminated units	b in mm	b in in.
1	293	11.54
2	371	14.61
3	449	17.68

---

Pre-assembled and Pre-wired Tower Light with Siren

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

