
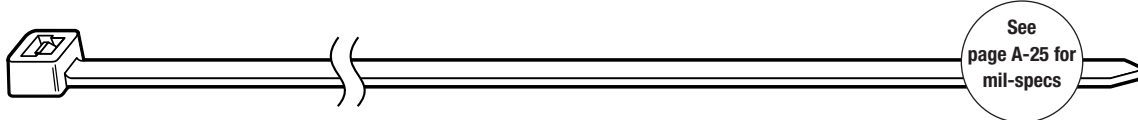



STANDARD CABLE TIES

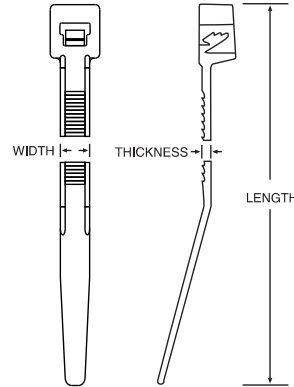

Heavy Duty 120 lb. Natural, UV Black

Per Bag	Part Number	Colour & Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Tie Tensile	Diameter Inch/mm	UR-CSA Mil-Spec	Per Case
100	L-81209C	Natural Nylon	8.70/220.98	.300/7.620	.076/1.930	120 lb.	2.06/52.38	UR-CSA	3,000
100	L-81200C	UV Black Nylon							
100	L-141209C	Natural Nylon UV Black Nylon	15.09/383.36	.300/7.620	.076/1.930	120 lb.	4.06/103.18	UR-CSA MS3367-3*	2,000
100	L-141209								
100	L-141200C								
100	L-141200								
50	L-181209L	Natural Nylon	17.70/449.58	.305/7.747	.080/2.032	120 lb.	5.00/127.00	UR	1,000
50	L-181200L	UV Black Nylon							
50	L-301209L	Natural Nylon	30.6/781.00	.305/7.747	.080/2.032	120 lb.	9.00/288.60	UR	500
50	L-301200L	UV Black Nylon							
50	L-301209C	Natural Nylon	28.50/723.90	.305/7.747	.080/2.032	120 lb.	8.00/203.20	UR	500
50	L-301200C	UV Black Nylon							

Tolerance: .XXX = ±.005, .XX = ±.015, Fraction = ±1/32"



Extra Heavy Duty 175 lb. Natural, UV Black, & Gray

Per Bag	Part Number	Colour & Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Tie Tensile	Diameter Inch/mm	UR-CSA Mil-Spec	Per Case
50	L-241759L	Natural Nylon	25.25/641.35	.340/8.636	.090/2.286	175 lb.	7.18/182.56	UR-CSA UL 181B-C MS3367-8,9,&10	500
50	L-241750L	UV Black Nylon							
50	L-361759L	Natural Nylon	37.25/946.15	.340/8.636	.090/2.286	175 lb.	11.00/279.40	UR-CSA UL 181B-C MS3367-11,12,&13	500
50	L-361750L	UV Black Nylon							
50	L-481759L	Natural Nylon	48.50/1231.9	.340/8.636	.090/2.286	175 lb.	14.50/368.30	UR-CSA UL 181B-C MS3367-14,15,&16	500
50	L-481758L	Gray Nylon							
50	L-481750L	UV Black Nylon							

Tolerance: .XXX = ±.005, .XX = ±.015, Fraction = ±1/32"

